

Slabs USA





La bellezza delle grandi superfici e le elevate prestazioni del grès.

Dall'esperienza ultradecennale di Emilgroup nasce una linea di lastre di porcellanato in diversi formati e in vari spessori per costruire oggetti come top e backsplash per cucine e bagni, piani lavoro, tavoli, ante, soluzioni di rivestimento a pavimento e a parete senza soluzione di continuità coniugando la massima ricercatezza estetica con i vantaggi in termini di resistenza, igiene e praticità che solo il gres porcellanato può garantire.

Un progetto all'insegna della massima modularità e versatilità per valorizzare tutto il potenziale di chi, giorno dopo giorno, ambisce a trasformare la materia in pregevole design.

Con 5 ispirazioni - Marble, Concrete, Stone, Resine e Solid - Ergon Slabs USA assicura il massimo grado di libertà espressiva ed è al completo servizio di una progettazione al passo con le tendenze più attuali e innovative. La materia prima ideale per creare soluzioni di arredo e design dall'altissimo valore estetico e tecnico, in grado di soddisfare le sensibilità. e i gusti più svariati ed esigenti.

Accorgimenti e controlli minuziosi lungo l'intera filiera produttiva assicurano una qualità assoluta delle lastre.

Dal punto di vista estetico, la selezione delle migliori materie e la colorazione degli impasti ad umido garantiscono la massima omogeneità cromatica delle superfici; in aggiunta, la definizione delle immagini ad altissima risoluzione e processi di levigatura di altissima precisione contribuiscono a renderle ricche di sfumature, vibranti di luce ed estremamente riflettenti nelle versioni levigate.

Dal punto di vista delle prestazioni, la pressatura ai massimi livelli rende i materiali finiti estremamente compatti, e un ciclo di cottura molto più lento di quelli comunemente adottati riduce al minimo il tensionamento delle lastre. È così che i semilavorati possono vantare livelli di

duttilità, planarità e resistenza impareggiabili, prestandosi molto meglio di altri materiali ai tagli, alle incisioni e alle altre lavorazioni



The beauty of large surfaces and the outstanding performances of stoneware.

Emilgroup has drawn on over a decade of experience to originate a collection of porcelain slabs in various sizes and thicknesses, for creating objects such as kitchen and bathroom counters and backsplashes, worktops, tables and unit fronts, and seamless wall and floor coverings, combining the utmost aesthetic refinement with advantages in terms of hygiene, strength and practicality that only porcelain stoneware can guarantee.

A project that delivers the utmost modularity and versatility to express the full potential of those who aspire, day after day, to transform material into attractive design.

With 5 inspirations – Marble, Concrete, Stone, Resin and Solid – Ergon Slabs USA guarantees the highest degree of freedom of expression and is the ideal medium for architectural design in step with the latest, most innovative trends. The ideal raw material for creating furnishing and design solutions with a high aesthetic and technical value, to satisfy the most varied and demanding taste.

Meticulous measures and controls throughout the entire production chain ensure that high-quality slabs are produced.

From an aesthetic point of view, the selection of the best materials and the coloring of the wet mixtures guarantee that the surfaces have a highly uniform color; additionally, the very high-resolution images and highly precise polishing processes give the polished versions striking shades and a vibrant shine, making them extremely reflective.

From a performance point of view, pressing at maximum levels makes the finished materials extremely compact, while a firing cycle that is much slower than is generally the case reduces the tension of the slabs to a minimum. Consequently, these unfinished materials boast incomparable levels of ductility, flatness and resistance, and are much more suitable than other materials for cuts, incisions and other finishing processes.




MARBLE



BIANCO ARNI

BOOKMATCH

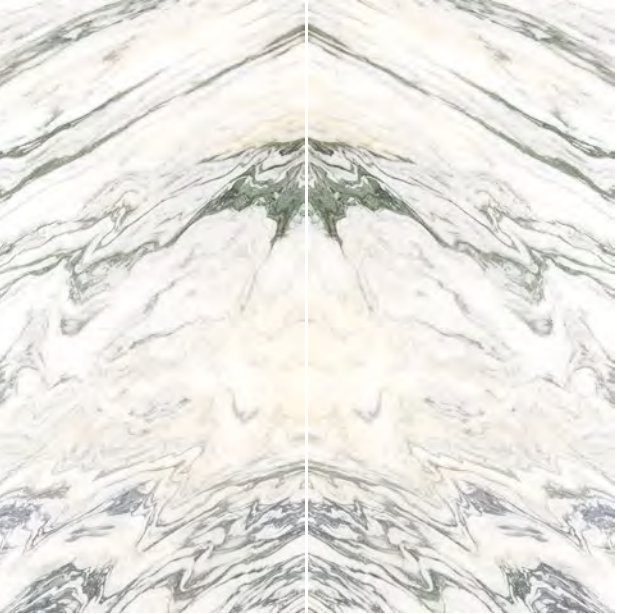

BIANCO ARNI A

 12MM Non Rettificato
ELCC 162x324 - 63^{25/32}"x127^{9/16}" Naturale R9
ELCJ 162x324 - 63^{25/32}"x127^{9/16}" Full Lappato

BIANCO ARNI B


 12MM Non Rettificato
ELCD 162x324 - 63^{25/32}"x127^{9/16}" Naturale R9
ELCK 162x324 - 63^{25/32}"x127^{9/16}" Full Lappato

BIANCO ARNI A


 6,5MM Rettificato
ELCU 160x320 - 62^{63/64}"x125^{63/64}" Full Lappato

BIANCO ARNI B

 6,5MM Rettificato
ELCV 160x320 - 62^{63/64}"x125^{63/64}" Full Lappato

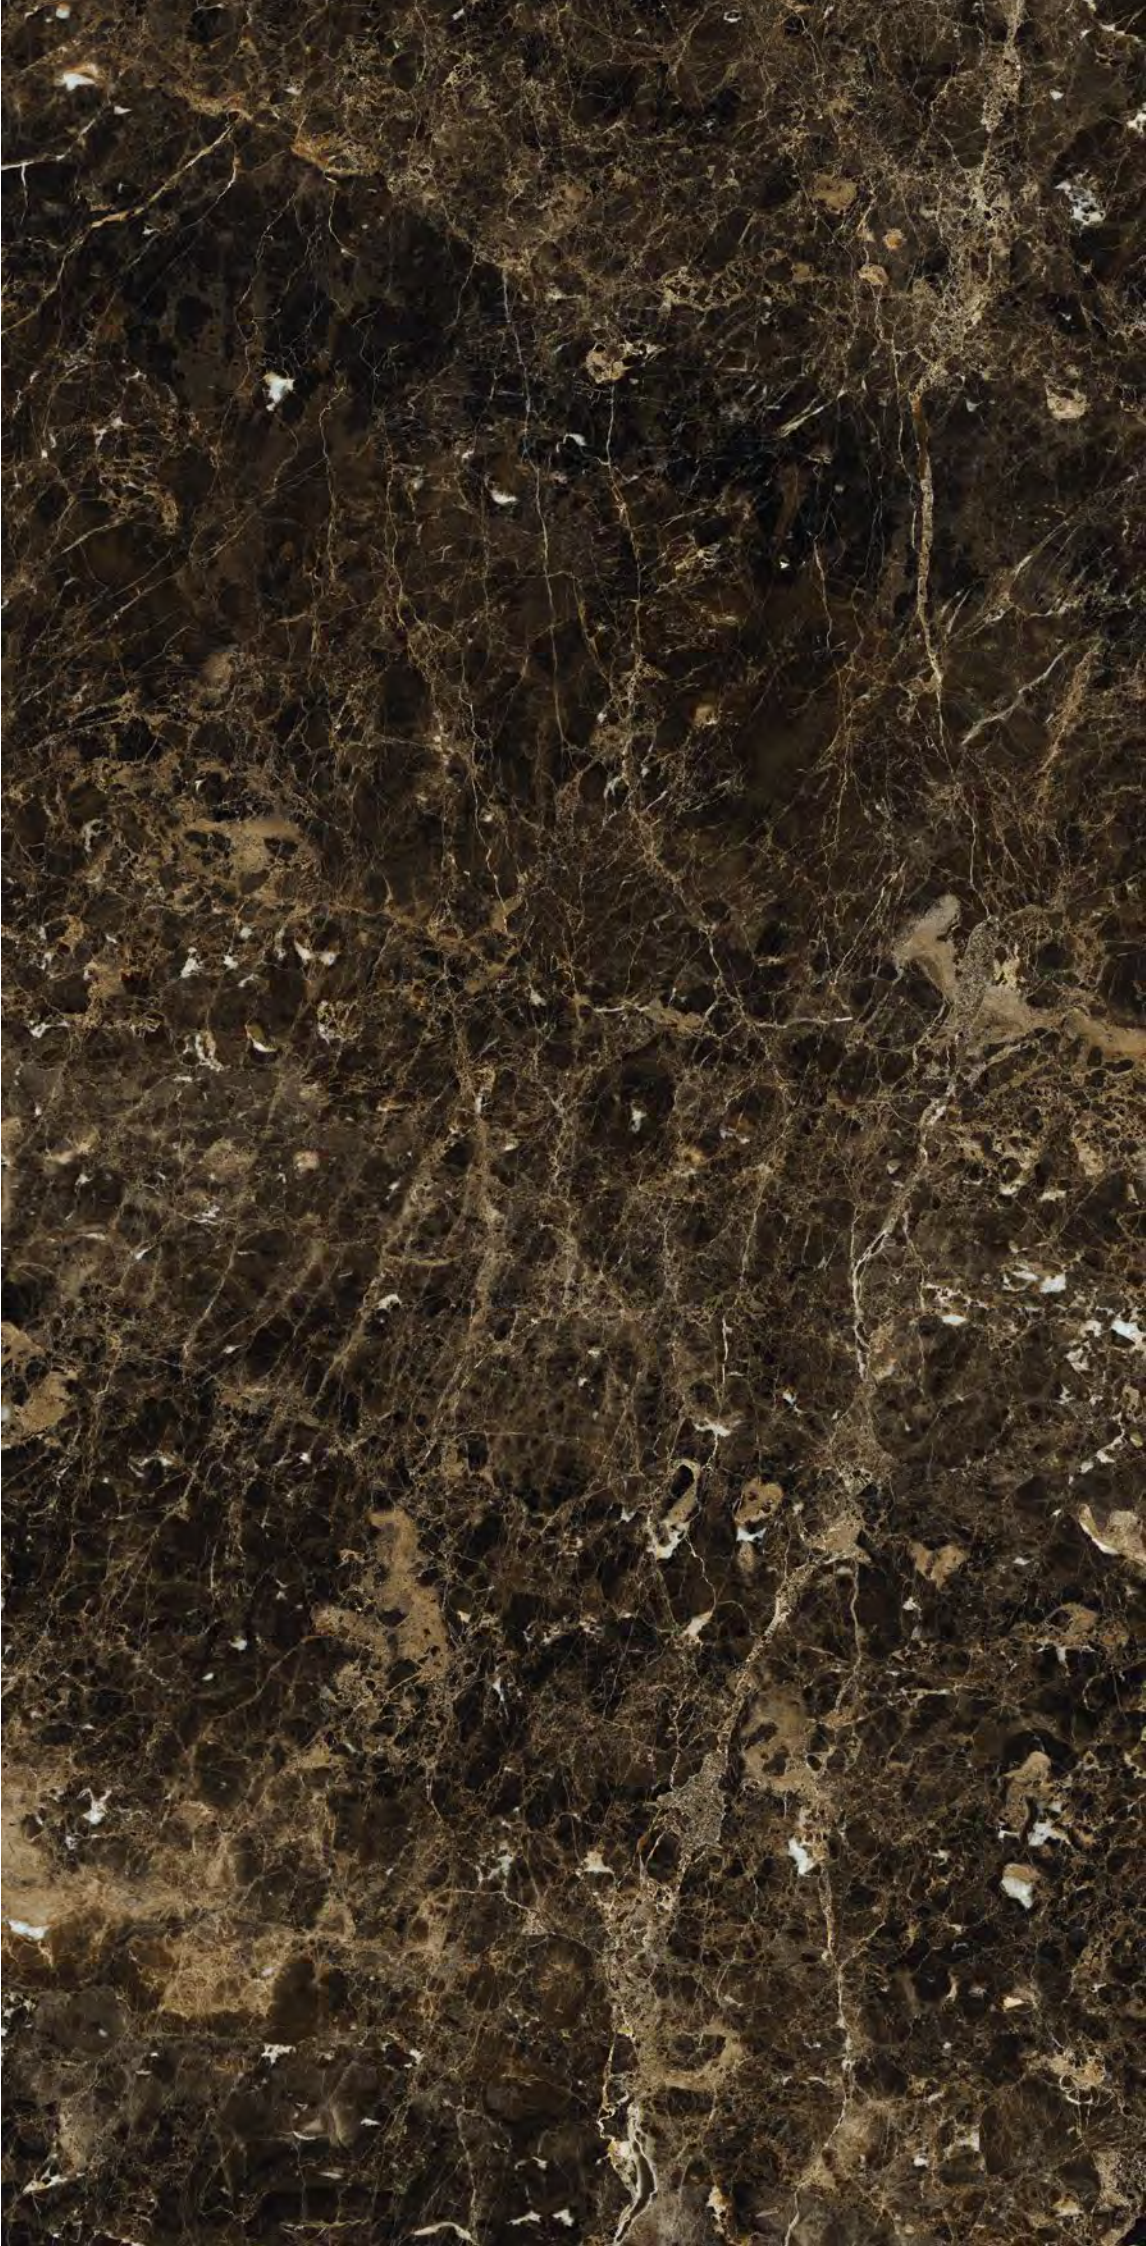

BROWN EMPERADOR

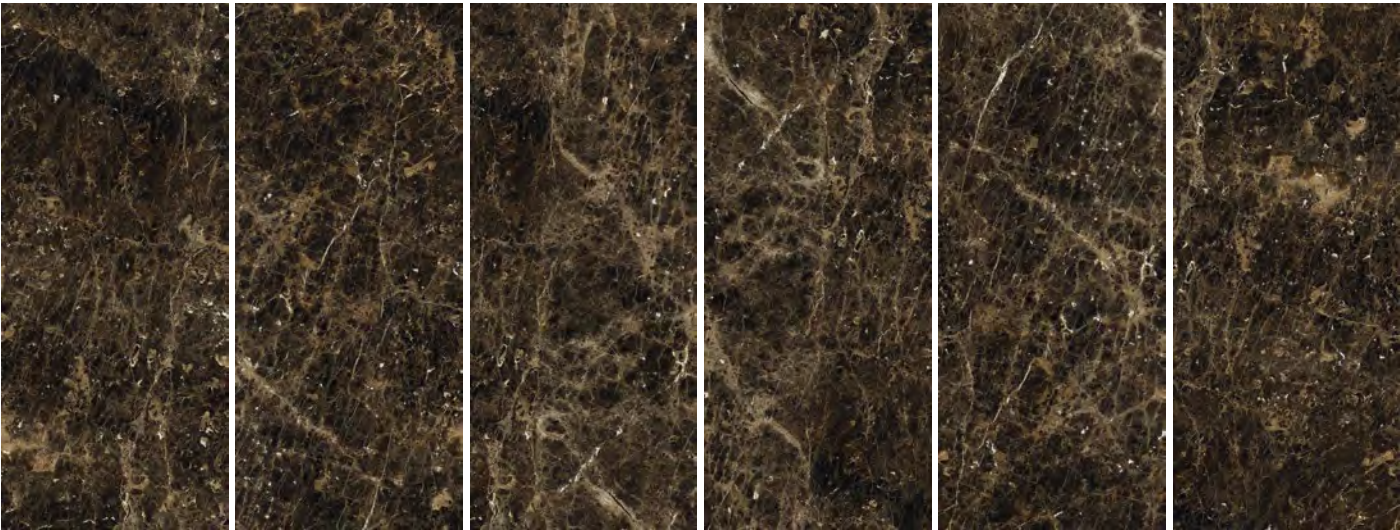

BROWN EMPERADOR
⊞ 6,5MM Rettificato
EHZ8 120x278 - 47^{1/4}"x109^{7/16}" Full Lappato



CALACATTA GOLD



CALACATTA GOLD
⊞ 6,5MM Rettificato
EHYR 120x278 - 47^{1/4}"x109^{7/16}" Naturale R9
EHZA 120x278 - 47^{1/4}"x109^{7/16}" Full Lappato




MOSAICO CALACATTA GOLD
Tessera - Chip 3x3 - 1^{3/16}"x1^{3/16}"
⊞ 9,5MM Rettificato
ELKC 30x30 - 11^{13/16}"x11^{13/16}" Naturale R9

* Also available in 9,5 mm standard porcelain tile version.
Call or email for details.



FRAPPUCCINO

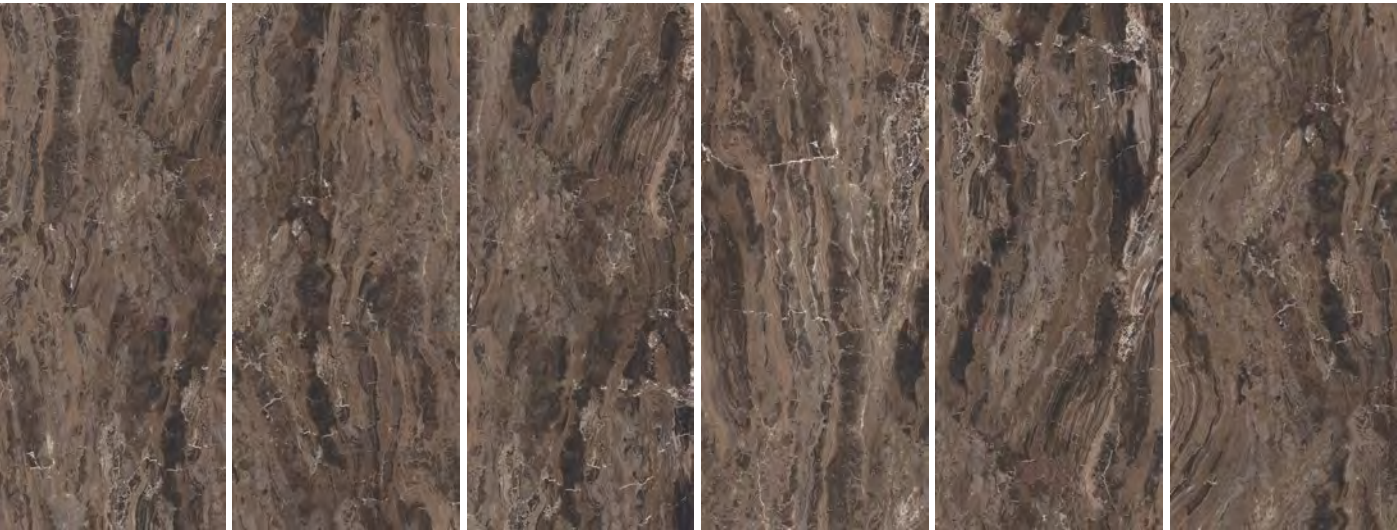


FRAPPUCCINO
⊞ 6,5MM Rettificato
EHYS 120x278 - 47^{1/4}"x109^{7/16}" Naturale R9
EHZC 120x278 - 47^{1/4}"x109^{7/16}" Full Lappato

* Also available in 9,5 mm standard porcelain tile version.
Call or email for details.




GRAPHITE

BOOKMATCH

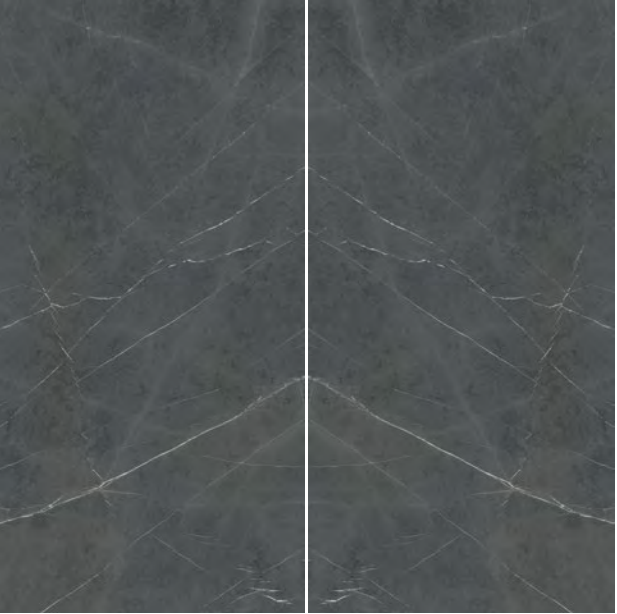

GRAPHITE A
12MM Non Rettificato
EHY8 162x324 - 63^{25/32}"x127^{9/16}" Full Lappato


GRAPHITE B
12MM Non Rettificato
EJ2J 162x324 - 63^{25/32}"x127^{9/16}" Full Lappato

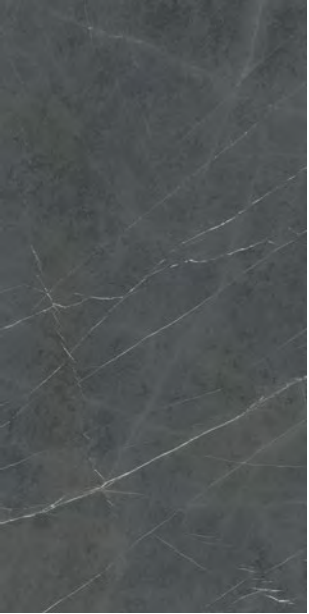

GRAPHITE
12MM Non Rettificato
EHY3 162x324 - 63^{25/32}"x127^{9/16}" Naturale R9



GRAPHITE
6,5MM Rettificato
EHYQ 120x278 - 47^{1/4}"x109^{7/16}" Naturale R9
EHZ9 120x278 - 47^{1/4}"x109^{7/16}" Full Lappato



MOSAICO GRAPHITE
Tessera - Chip 3x3 - 1^{3/16}"x1^{3/16}"
9,5MM Rettificato
ELKD 30x30 - 11^{13/16}"x11^{13/16}" Naturale R9

* Also available in 9,5 mm standard porcelain tile version.
Call or email for details.



LASA



LASA
 **12MM Non Rettificato**
ELKT 162x324 - 63^{25/32}"x127^{9/16}" Naturale R9
ELKV 162x324 - 63^{25/32}"x127^{9/16}" Full Lappato



LASA
 **6,5MM Rettificato**
EHYT 120x278 - 47^{1/4}"x109^{7/16}" Naturale R9
EHZD 120x278 - 47^{1/4}"x109^{7/16}" Full Lappato




MOSAICO LASA
Tessera - Chip 3x3 - 1^{3/16}"x1^{3/16}"
 **9,5MM Rettificato**
ELKA 30x30 - 11^{13/16}"x11^{13/16}" Naturale R9

* Also available in 9,5 mm standard porcelain tile version.
Call or email for details.

NERO MARQUINIA

BOOKMATCH

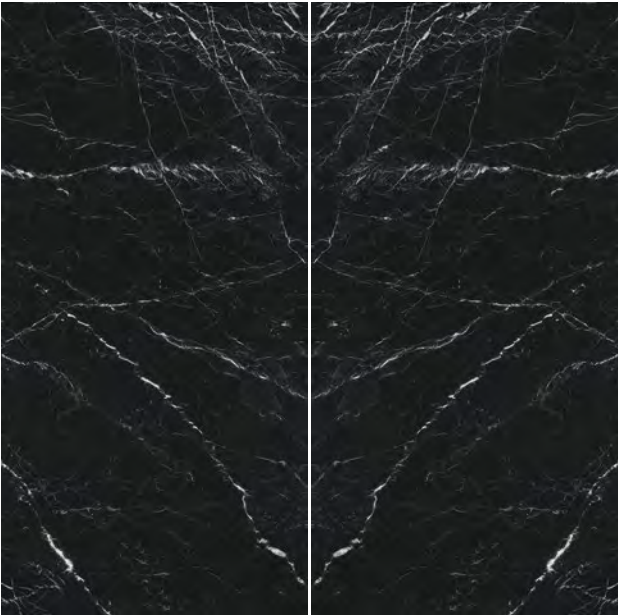


NERO MARQUINIA A
12MM Non Rettificato
EHYA 162x324 - 63^{25/32}"x127^{9/16}" Full Lappato


NERO MARQUINIA B
12MM Non Rettificato
EHYC 162x324 - 63^{25/32}"x127^{9/16}" Full Lappato



NERO MARQUINIA
12MM Non Rettificato
EHY5 162x324 - 63^{25/32}"x127^{9/16}" Naturale R9

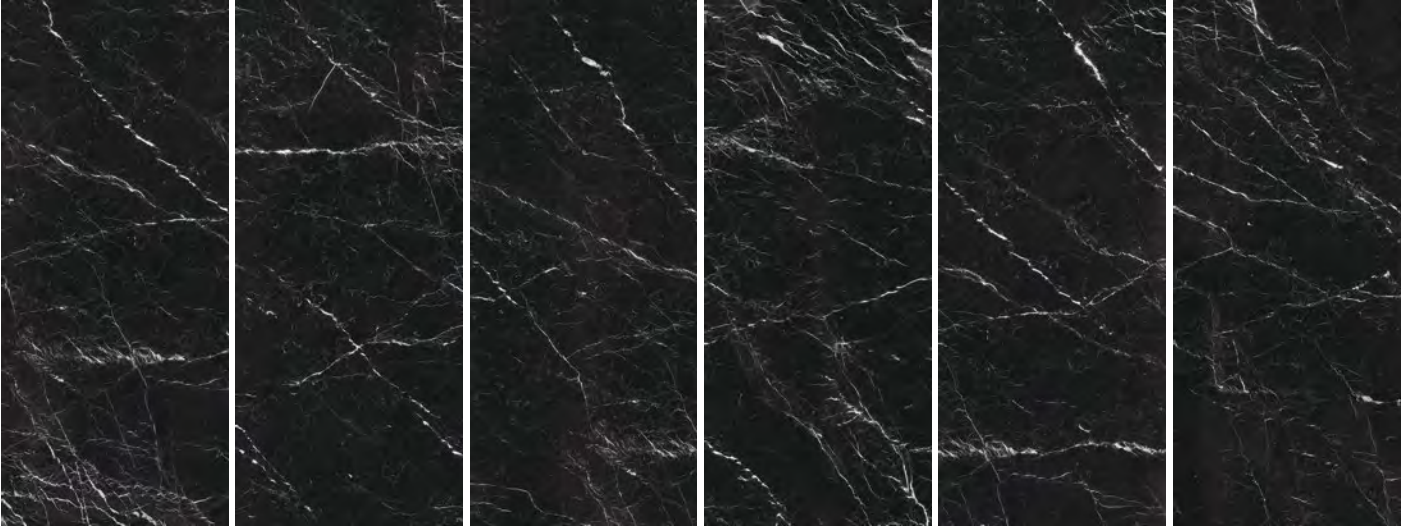

NERO MARQUINIA
6,5MM Rettificato
EHYV 120x278 - 47^{1/4}"x109^{7/16}" Naturale R9
EHZF 120x278 - 47^{1/4}"x109^{7/16}" Full Lappato



MOSAICO NERO MARQUINIA
Tessera - Chip 3x3 - 1^{3/16}"x1^{3/16}"
9,5MM Rettificato
ELKE 30x30 - 11^{13/16}"x11^{13/16}" Naturale R9

* Also available in 9,5 mm standard porcelain tile version.
Call or email for details.



ONICE BIANCO




ONICE BIANCO

⊕ 6,5MM Rettificato


EKJX 120x278 - 47^{7/16}"x109^{7/16}" Full Lappato




QUARZO BLUEGREY

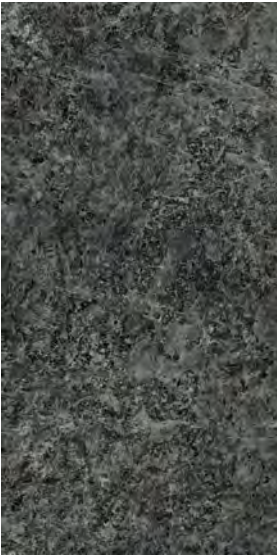

QUARZO BLUEGREY
12MM Non Rettificato
ELCG 162x324 - 63^{25/32}"x127^{9/16}" Naturale R9
ELCN 162x324 - 63^{25/32}"x127^{9/16}" Full Lappato

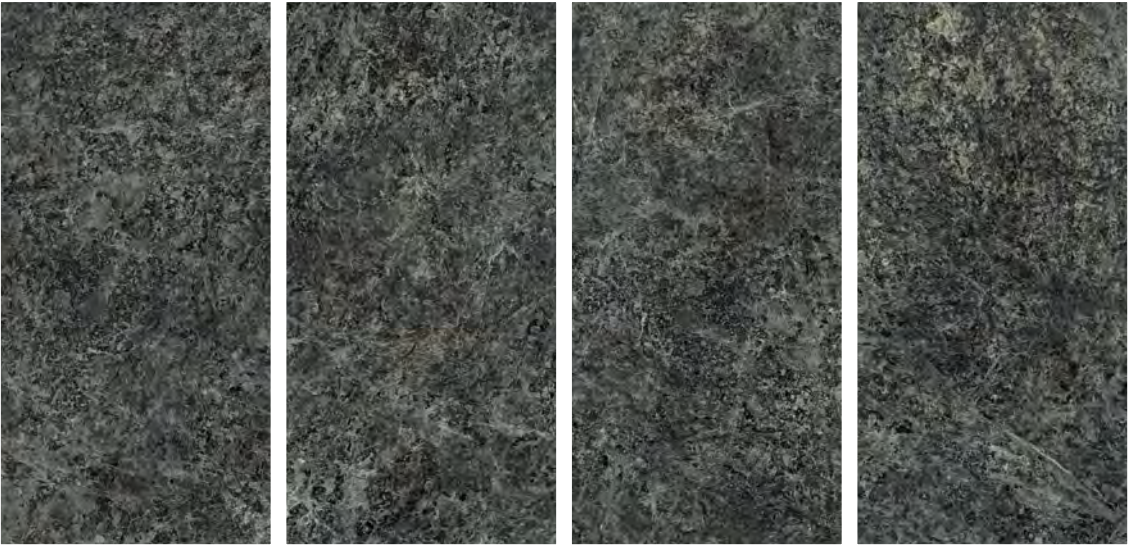


QUARZO BLUEGREY
6,5MM Rettificato
ELCS 160x320 - 62^{63/64}"x125^{63/64}" Naturale R9
ELCY 160x320 - 62^{63/64}"x125^{63/64}" Full Lappato

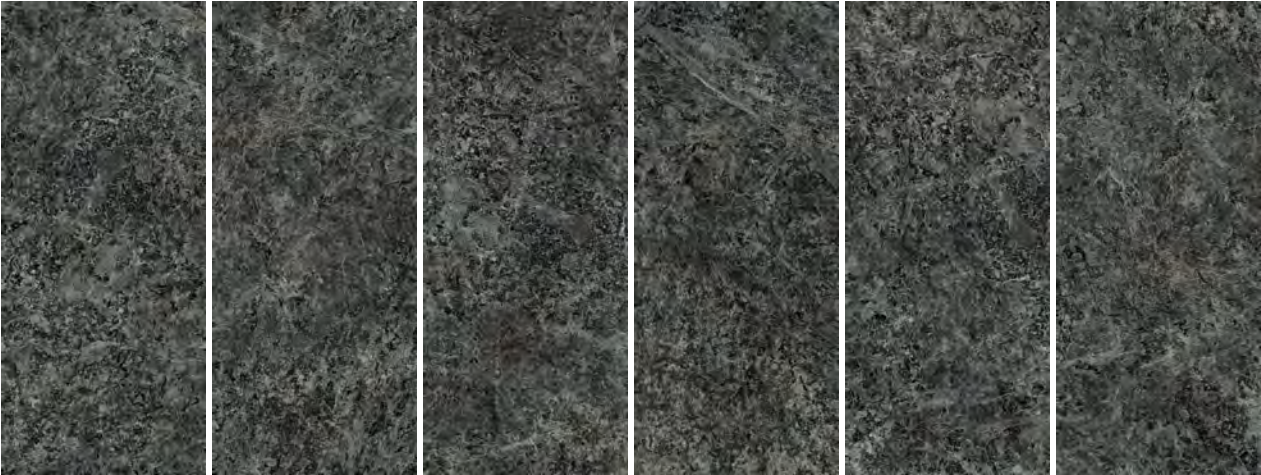




QUARZO BLUEGREY
6,5MM Rettificato
ELD6 120x278 - 47^{1/8}"x109^{7/16}" Naturale R9
ELD2 120x278 - 47^{1/8}"x109^{7/16}" Full Lappato



SAHARA NOIR

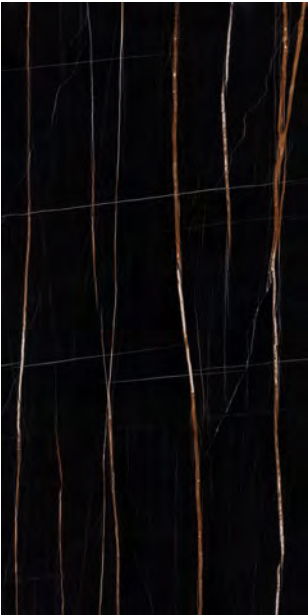

SAHARA NOIR
12MM Non Rettificato
ELAA 162x324 - 63^{25/32}"x127^{9/16}" Naturale R9
ELAG 162x324 - 63^{25/32}"x127^{9/16}" Full Lappato

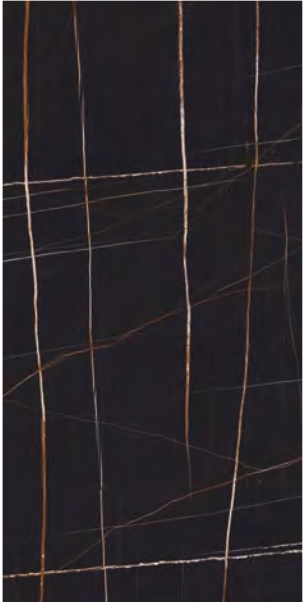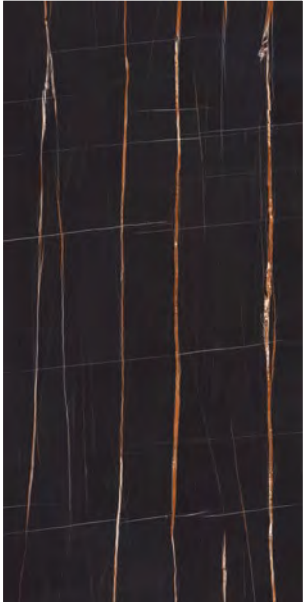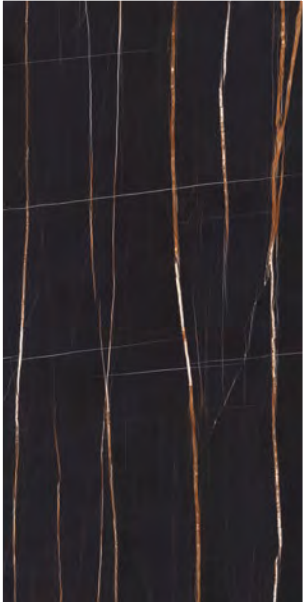

SAHARA NOIR
6,5MM Rettificato
EHYJ 160x320 - 62^{63/64}"x125^{63/64}" Full Lappato



SAINT LAURENT



SAINT LAURENT
6,5MM Rettificato
EHYW 120x278 - 47 1/4"x109 7/16" Naturale R9
EHZG 120x278 - 47 1/4"x109 7/16" Full Lappato

* Also available in 9,5 mm standard porcelain tile version.
Call or email for details.



STATUARIETTO



STATUARIETTO
12MM Non Rettificato
EHY4 162x324 - 63^{25/32}"x127^{7/16}" Naturale R9
EHY9 162x324 - 63^{25/32}"x127^{7/16}" Full Lappato



STATUARIETTO
6,5MM Rettificato
EHYU 120x278 - 47^{1/4}"x109^{7/16}" Naturale R9
EHZE 120x278 - 47^{1/4}"x109^{7/16}" Full Lappato



MOSAICO STATUARIETTO
Tessera - Chip 3x3 - 1^{3/16}"x1^{3/16}"
9,5MM Rettificato
ELK9 30x30 - 11^{13/16}"x11^{13/16}" Naturale R9


* Also available in 9,5 mm standard porcelain tile version.
Call or email for details.



STATUARIO SELECT



STATUARIO SELECT
12MM Non Rettificato
EHY2 162x324 - 63^{25/32}"x127^{7/16}" Naturale R9
EHY7 162x324 - 63^{25/32}"x127^{7/16}" Full Lappato

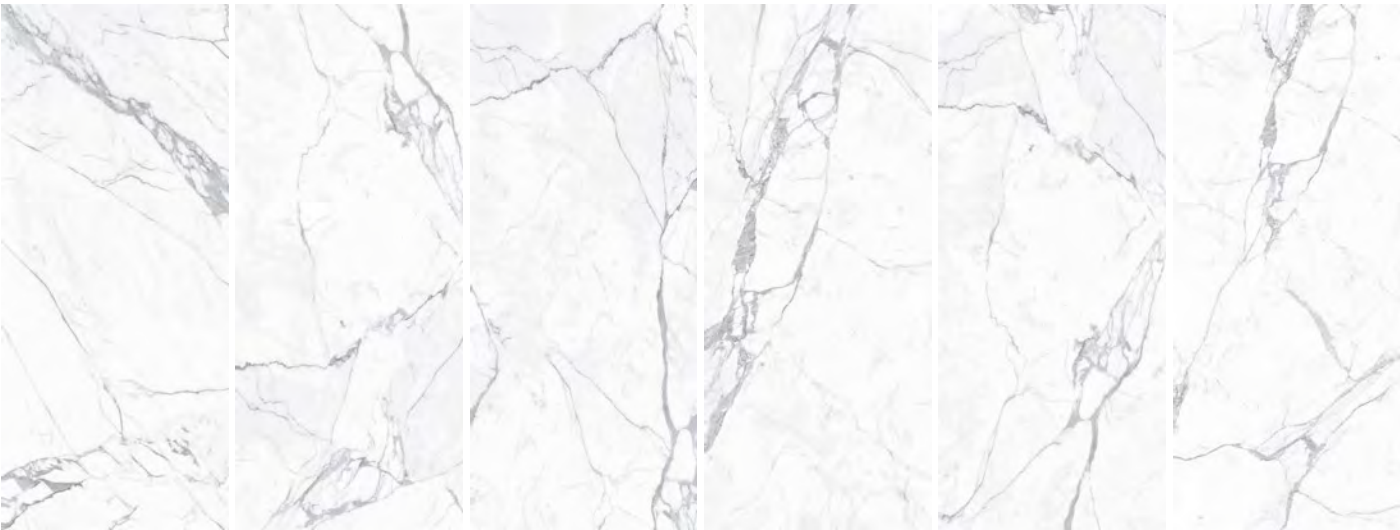

STATUARIO SELECT
6,5MM Rettificato
EHYP 120x278 - 47^{1/4}"x109^{7/16}" Naturale R9
EHZ6 120x278 - 47^{1/4}"x109^{7/16}" Full Lappato




MOSAICO STATUARIO SELECT
Tessera - Chip 3x3 - 1^{3/16}"x1^{3/16}"
9,5MM Rettificato
ELK8 30x30 - 11^{13/16}"x11^{13/16}" Naturale R9


* Also available in 9,5 mm standard porcelain tile version.
Call or email for details.









VERDE AVER

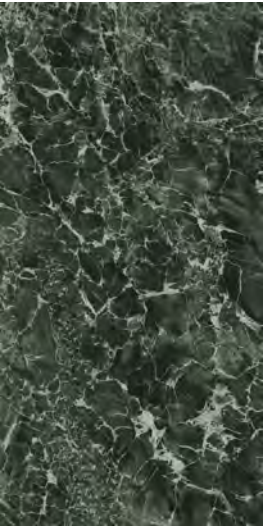







VERDE AVER
12MM Non Rettificato
ELAC 162x324 - 63^{25/32}"x127^{9/16}"
Naturale R9

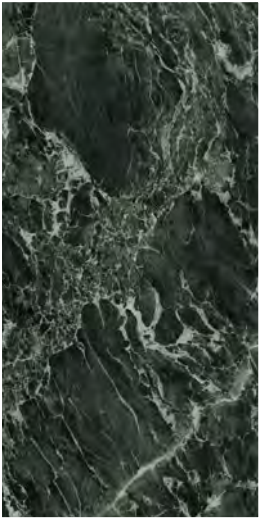


VERDE AVER
6,5MM Rettificato
ELAJ 160x320 - 62^{63/64}"x125^{63/64}" Naturale R9
EHYK 160x320 - 62^{63/64}"x125^{63/64}" Full Lappato

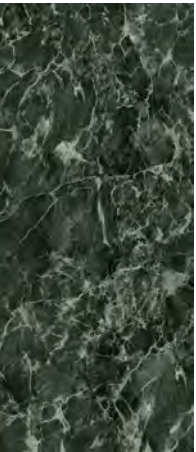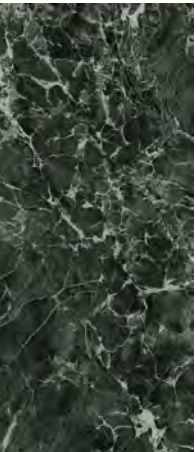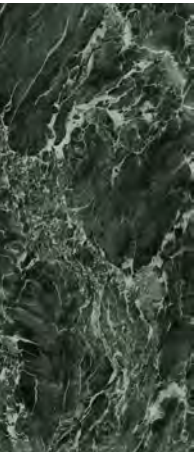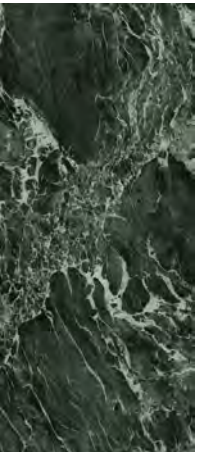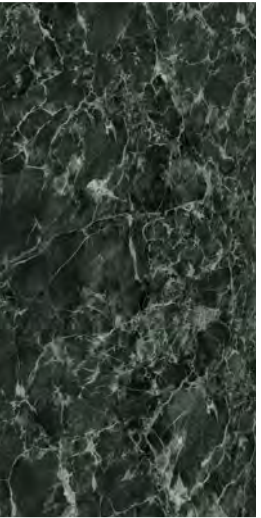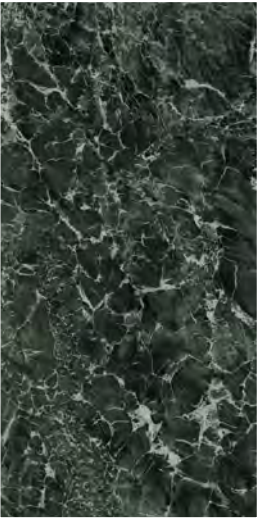


VERDE AVER
6,5MM Rettificato
ELAL 120x278 - 47^{1/8}"x109^{7/16}" Naturale R9
EKJZ 120x278 - 47^{1/8}"x109^{7/16}" Full Lappato



VERDE AVER
6,5MM Rettificato
ELAN 120x120 - 47^{1/8}"x47^{1/8}" Naturale R9

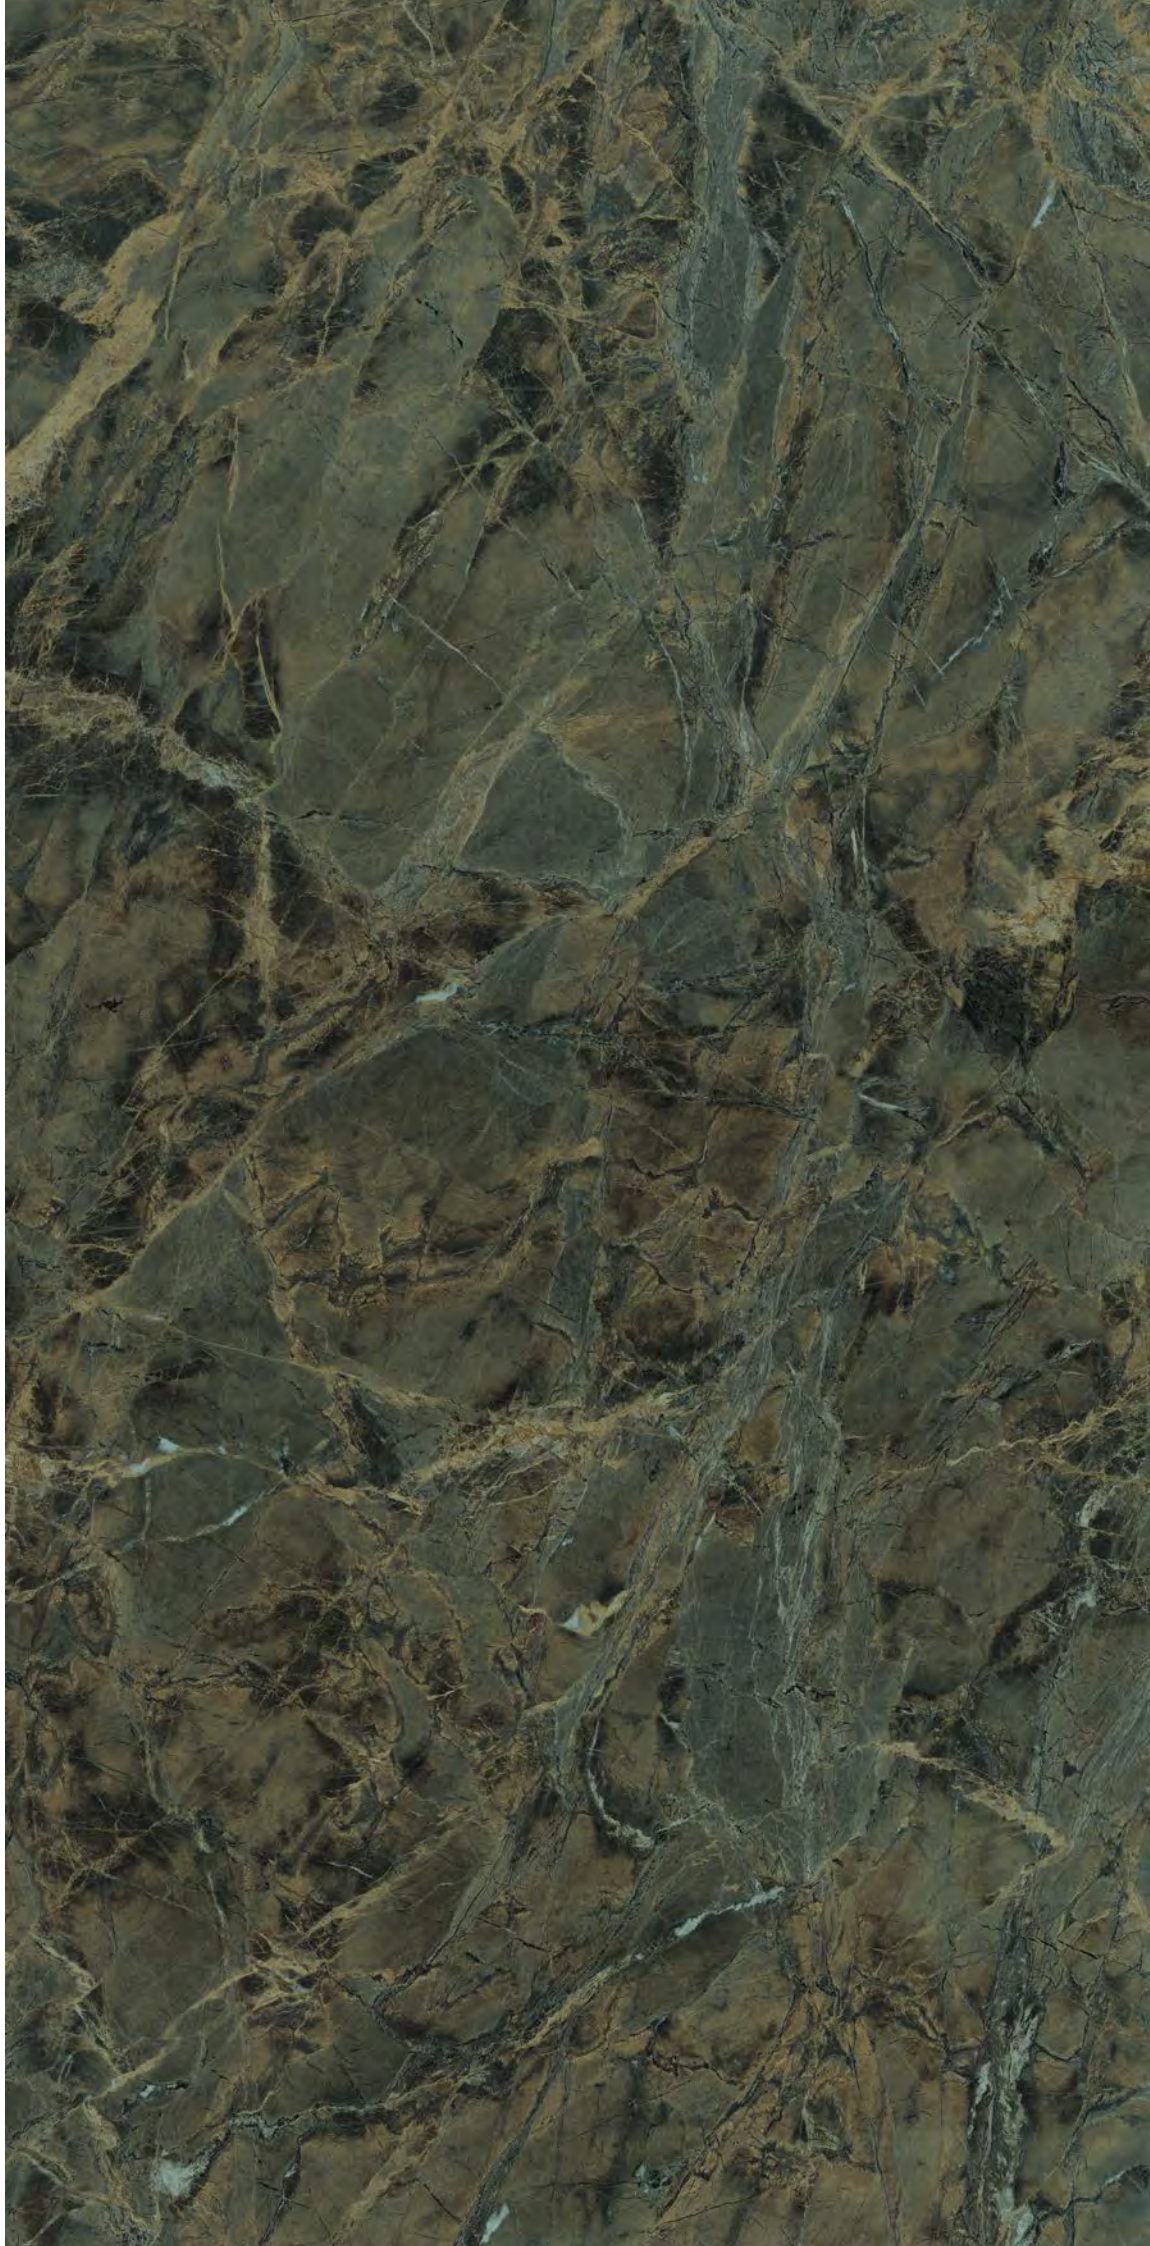

VERDE BORGOGNA

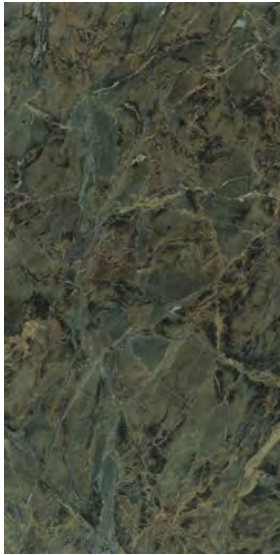





VERDE BORGOGNA

 **12MM Non Rettificato**
ELCF 162x324 - 63^{25/32}"x127^{9/16}" Naturale R9
ELCM 162x324 - 63^{25/32}"x127^{9/16}" Full Lappato



VERDE BORGOGNA

 **6,5MM Rettificato**
ELCR 160x320 - 62^{63/64}"x125^{63/64}" Naturale R9
ELCX 160x320 - 62^{63/64}"x125^{63/64}" Full Lappato

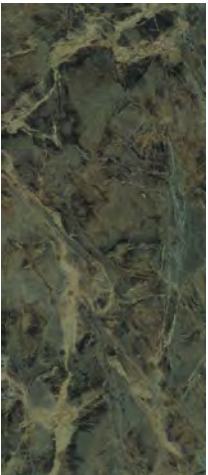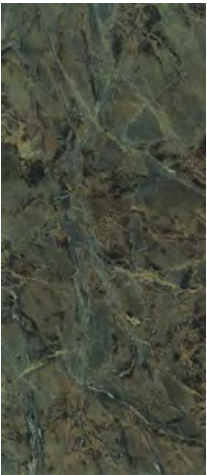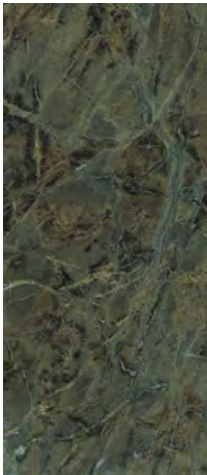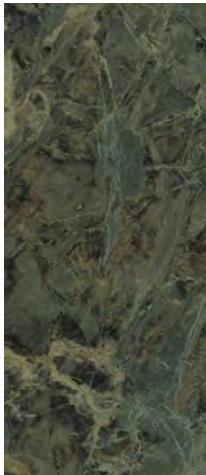


VERDE BORGOGNA

 **6,5MM Rettificato**
ELD5 120x278 - 47^{1/8}"x109^{7/16}" Naturale R9
ELD1 120x278 - 47^{1/8}"x109^{7/16}" Full Lappato



CONCRETE

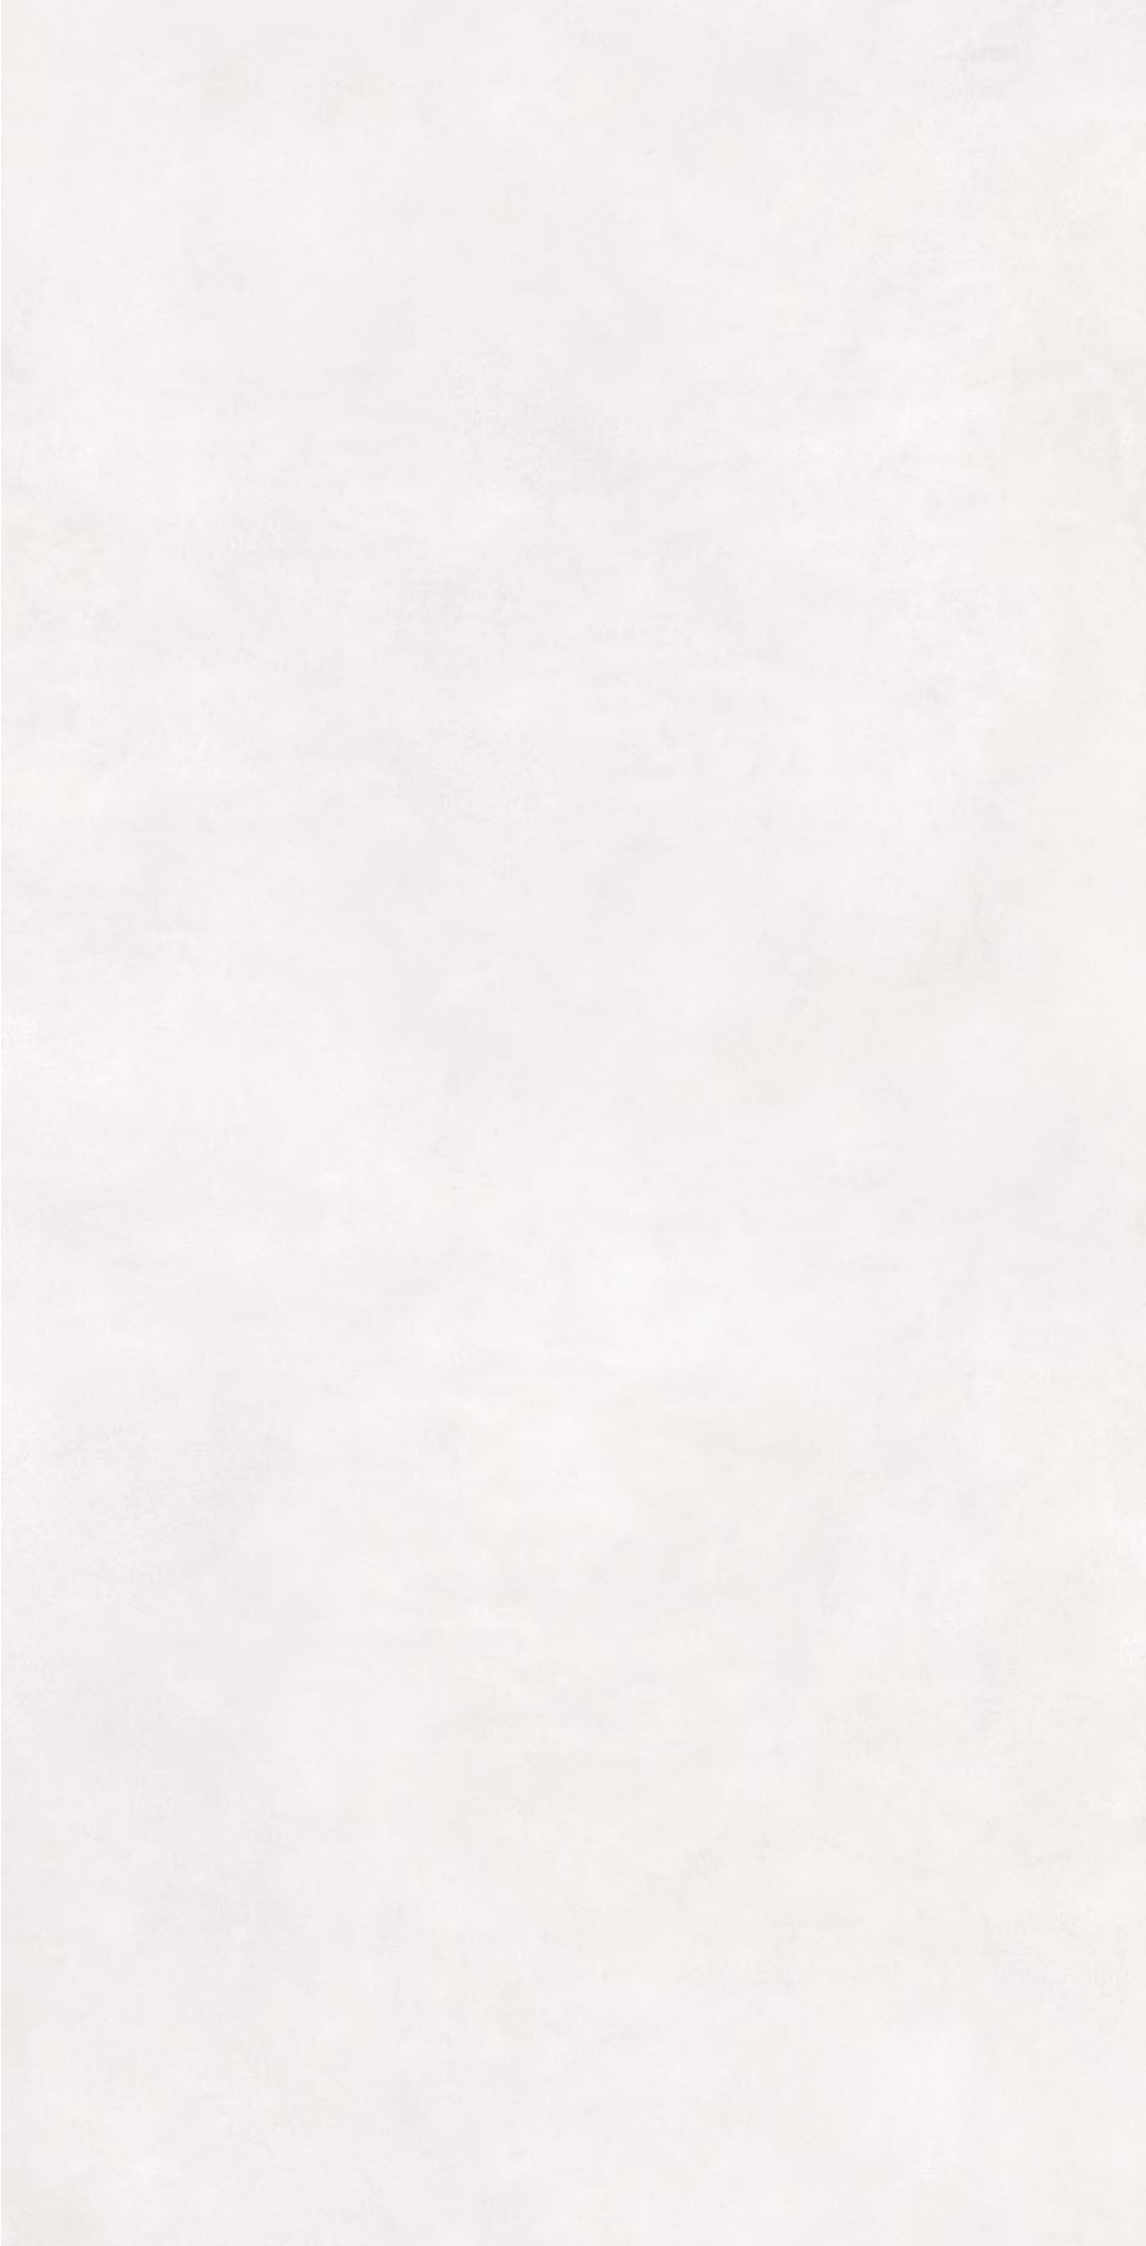

BIANCO




BIANCO
 **12MM Non Rettificato**
EHZJ 162x324 - 63^{25/32}"x127^{9/16}" Naturale R9




BIANCO
 **6,5MM Rettificato**
EHZN 120x278 - 47^{1/4}"x109^{7/16}" Naturale R9




BOTANIC

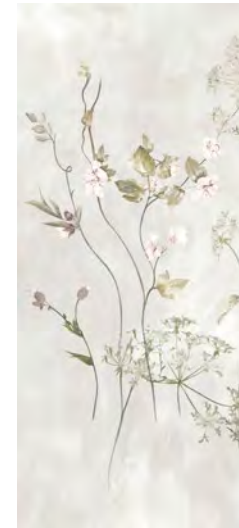

BOTANIC DECOR A
 6,5MM Rettificato
 EHZR 120x278 - 47^{1/4}"x109^{7/16}"
 Naturale

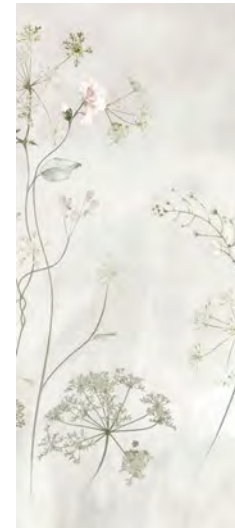

BOTANIC DECOR B
 6,5MM Rettificato
 EHVS 120x278 - 47^{1/4}"x109^{7/16}"
 Naturale

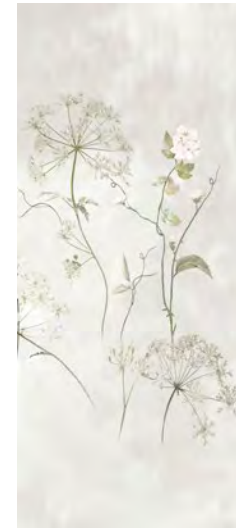


BOTANIC DECOR C
 6,5MM Rettificato
 EHVT 120x278 - 47^{1/4}"x109^{7/16}"
 Naturale

Slabs may only be used for covering indoor walls.

The intense colours developed and the uniquely defined details are created using an innovative production technology that requires specific attention during installation.
 For more information see page 91


GRIGIO CHIARO

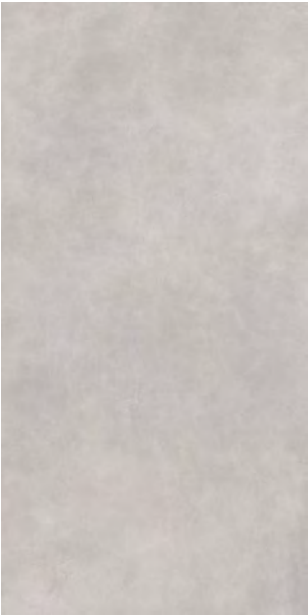

GRIGIO CHIARO
12MM Non Rettificato
EHZK 162x324 - 63^{25/32"}x127^{7/16"} Naturale R9




GRIGIO CHIARO
6,5MM Rettificato
EHZP 120x278 - 47^{1/4"}x109^{7/16"} Naturale R9

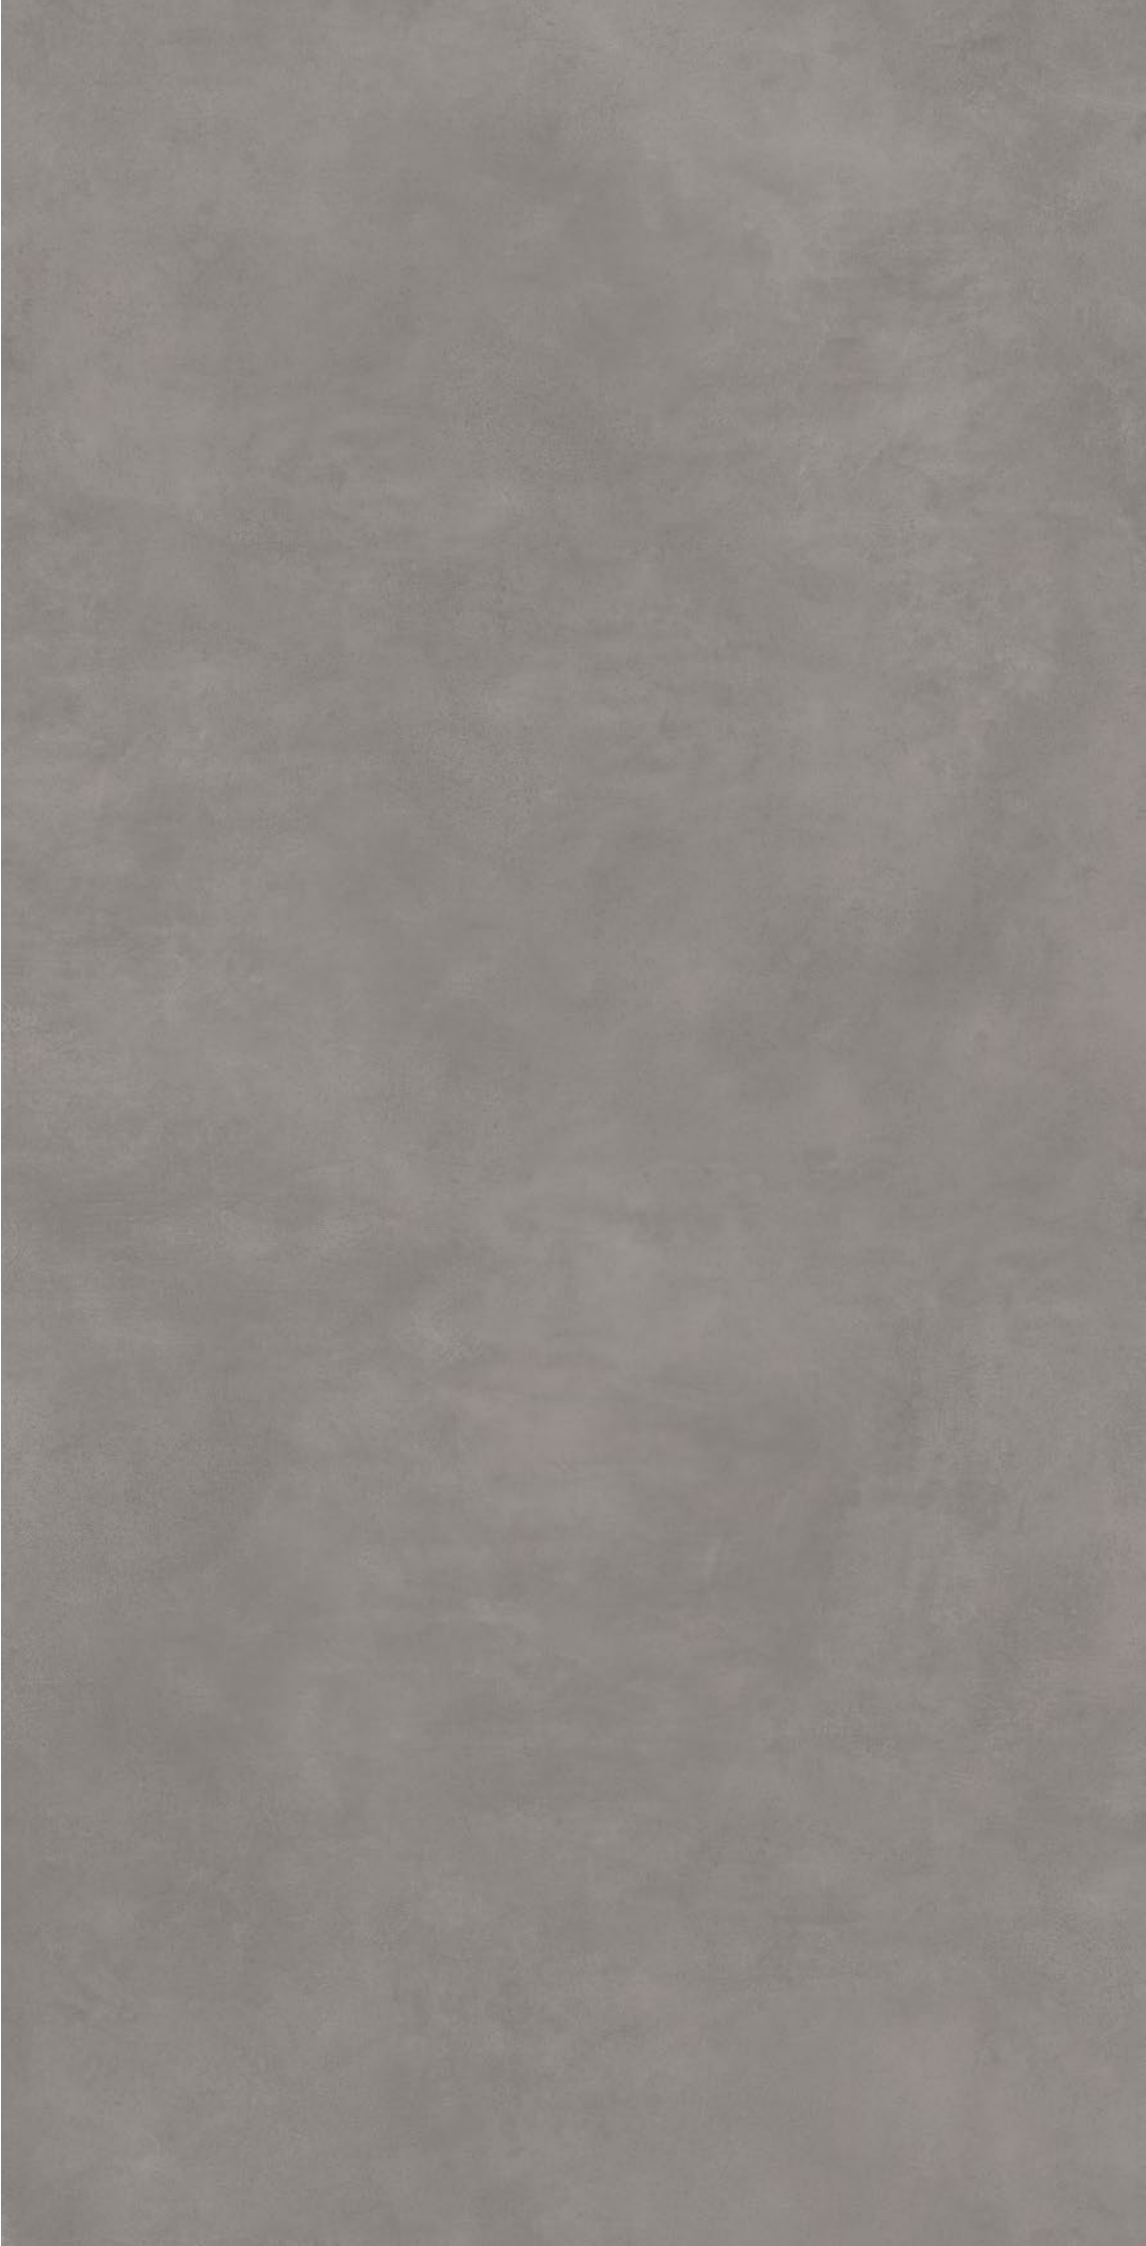

GRIGIO SCURO



GRIGIO SCURO
12MM Non Rettificato
EHZL 162x324 - 63^{25/32"}x127^{9/16"} Naturale R9

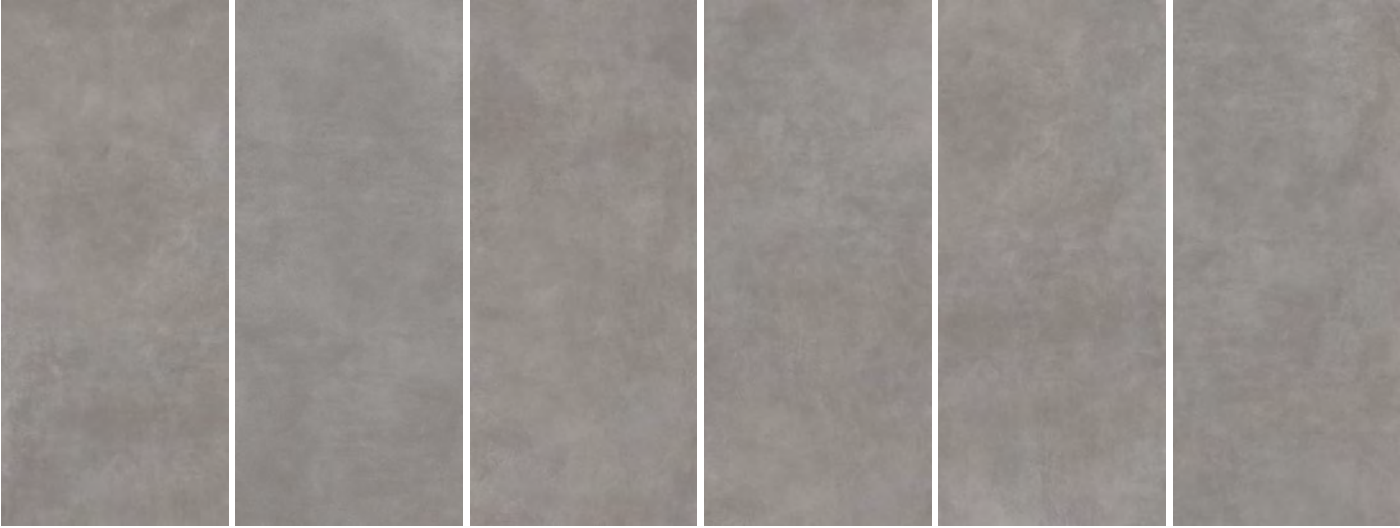

GRIGIO SCURO
6,5MM Rettificato
EHZQ 120x278 - 47^{1/4"}x109^{7/16"} Naturale R9



STONE




CEPPO DI GRE'



CEPPO DI GRE'
12MM Non Rettificato
EJ1C 162x324 - 63^{25/32"}x127^{9/16"}
Naturale R9




CEPPO DI GRE'
6,5MM Rettificato
EJ1J 160x320 - 62^{63/64"}x125^{63/64"} Naturale R9

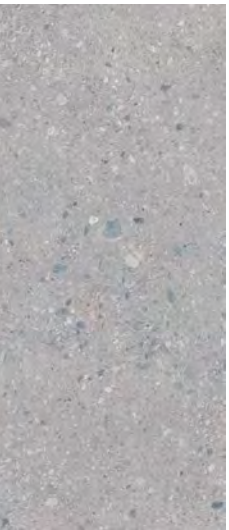


CEPPO DI GRE'
6,5MM Rettificato
EKK1 120x278 - 47^{1/4"}x109^{7/16"} Naturale R9

△ Also available in a coordinating 9,5 mm standard porcelain tile version.
Call or email for details.

GRANITO BLACK

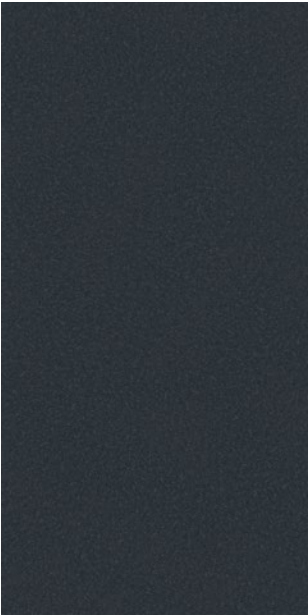

GRANITO BLACK
EJ1F 162x324 - 63^{25/32}"x127^{9/16}" Naturale R9

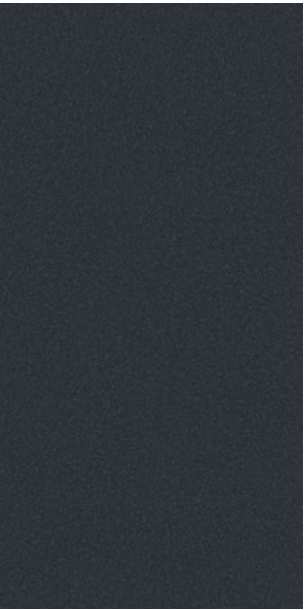

GRANITO BLACK
EJ07 160x320 - 62^{3/64}"x125^{63/64}" Naturale R9



GRIS DU GENT



GRIS DU GENT
12MM Non Rettificato
EJ1E 162x324 - 63^{25/32"}x127^{9/16"} Naturale R9



GRIS DU GENT
6,5MM Rettificato
EJ06 160x320 - 62^{63/64"}x125^{63/64"} Naturale R9




MOONSTONE



MOONSTONE
12MM Non Rettificato
EJ1D 162x324 - 63^{25/32"}x127^{9/16"} Naturale R9



SLATE BLACK

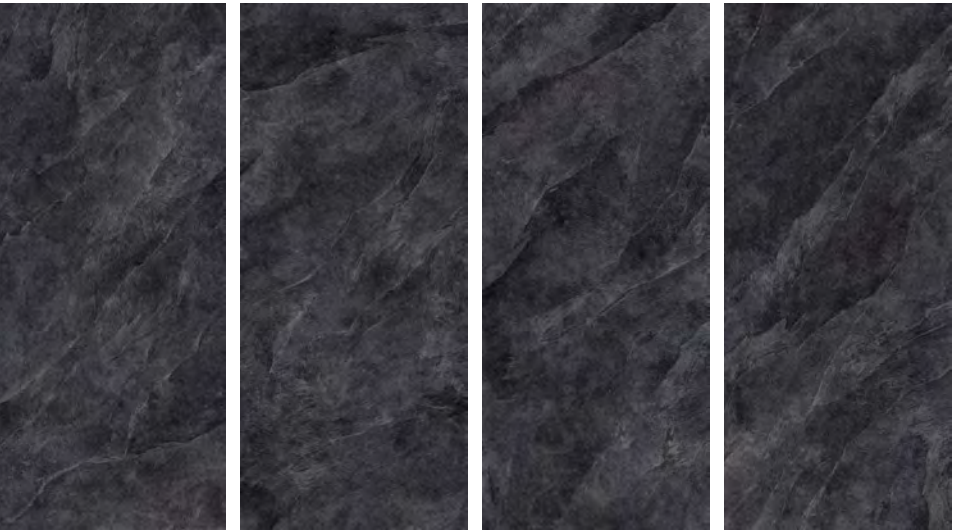

SLATE BLACK
⊕ 6,5MM Rettificato
EJ22 120x278 - 47^{1/8}"x109^{7/16}" Naturale R9

* Also available in 9,5 mm standard porcelain tile version.
Call or email for details.



SLATE GREY



SLATE GREY

 6,5MM Rettificato

EJ21 120x278 - 47^{1/8}"x109^{7/16}" Naturale R9

* Also available in 9,5 mm standard porcelain tile version.
Call or email for details.



SLATE WHITE



SLATE WHITE
⊕ 6,5MM Rettificato
EJ20 120x278 - 47^{1/4}"x109^{7/16}" Naturale R9

* Also available in 9,5 mm standard porcelain tile version.
Call or email for details.



RESINE



BEIGE



BEIGE
✚ 6,5MM Rettificato
EJOP 120x278 - 47^{1/4"}x109^{7/16"} Naturale R9



BIANCO



BIANCO
✚ 6,5MM Rettificato
EJOM 120x278 - 47^{1/4"}x109^{7/16"} Naturale R9



GRIGIO



GRIGIO
✚ 6,5MM Rettificato
EJON 120x278 - 47^{1/4"}x109^{7/16"} Naturale R9



GRISAILLE



GRISAILLE DECOR A
6,5MM Rettificato
EJOV 120x278 - 47^{1/4}"x109^{7/16}"
Naturale



GRISAILLE DECOR B
6,5MM Rettificato
EJOW 120x278 - 47^{1/4}"x109^{7/16}"
Naturale



GRISAILLE DECOR C
6,5MM Rettificato
EJOX 120x278 - 47^{1/4}"x109^{7/16}"
Naturale

Slabs may only be used for covering indoor walls.

The intense colours developed and the uniquely defined details are created using an innovative production technology that requires specific attention during installation. For more information see page 91



VERDE CHIARO




VERDE CHIARO
✚ 6,5MM Rettificato
EJ0Q 120x278 - 47^{1/4"}x109^{7/16"} Naturale R9




SOLID COLORS


WHITE

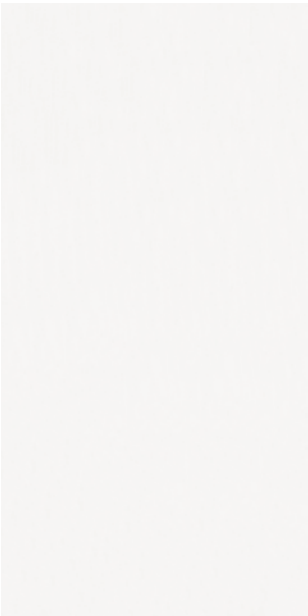


WHITE
 12MM Non Rettificato
EJ12 162x324 - 63^{25/32"}x127^{9/16"} Full Lappato

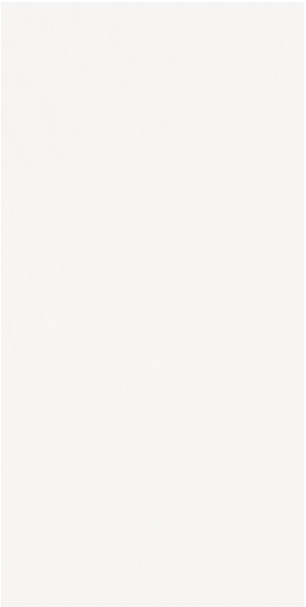

WHITE
 6,5MM Rettificato
EJ14 160x320 - 62^{63/64"}x125^{63/64"} Naturale R9
EJ16 160x320 - 62^{63/64"}x125^{63/64"} Full Lappato

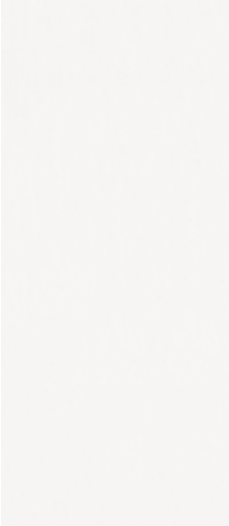

WHITE
 6,5MM Rettificato
ELAU 120x278 - 47^{1/4"}x109^{7/16"} Naturale R9
ELAS 120x278 - 47^{1/4"}x109^{7/16"} Full Lappato




WHITE
 6,5MM Rettificato
ELAY 120x120 - 47^{1/4"}x47^{1/4"} Naturale R9
ELAW 120x120 - 47^{1/4"}x47^{1/4"} Full Lappato



SILHOUETTE PROJECT

SILHOUETTE PROJECT

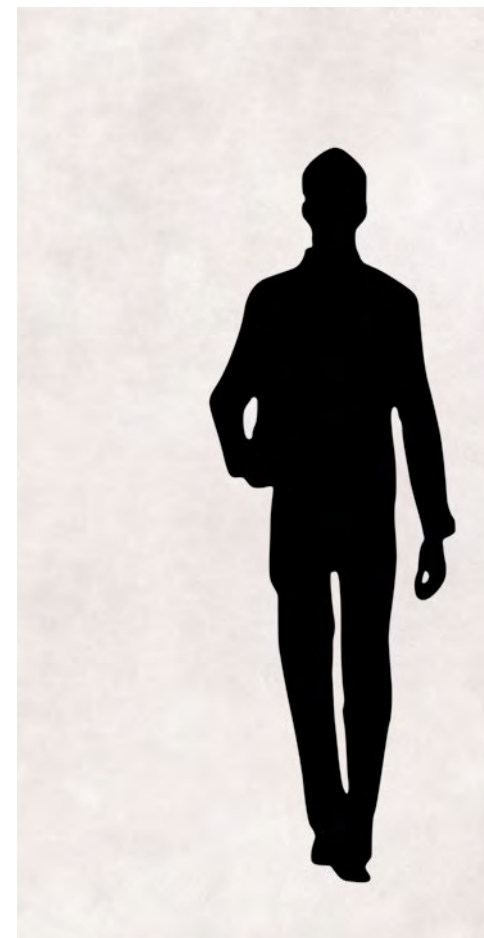

MAN  6,5MM Rettificato



WOMAN  6,5MM Rettificato

SIZES:

Available on:

- 120x278  6,5MM Rettificato Naturale R9 R9 & Full Lappato

Note: if the slab surface is Full Lappato the silhouette will be matt

MINIMUM ORDER:

2 slabs for man + 2 slabs for woman


DELIVERY:

6 weeks lead time for fabrication based on slab availability + shipping time


PRICE:

On request

SLABS CUT



 **6,5MM Rettificato**
160x160 - 62^{63/64"}x62^{63/64"}



 **6,5MM Rettificato**
80x160 - 31^{1/2"}x62^{63/64"}



 **6,5MM Rettificato**
40x160 - 15^{3/4"}x62^{63/64"}



 **6,5MM Rettificato**
20x160 - 7^{7/8"}x62^{63/64"}

Available on:

MARBLE

SAHARA NOIR

 **6,5MM Rettificato**

EHYJ 160x320 - 62^{63/64"}x125^{63/64"} Full Lappato

VERDE AVER

 **6,5MM Rettificato**

ELAJ 160x320 - 62^{63/64"}x125^{63/64"} Naturale R9

EHYK 160x320 - 62^{63/64"}x125^{63/64"} Full Lappato

STONE

GRANITO BLACK

 **6,5MM Rettificato**

EJ07 160x320 - 62^{63/64"}x125^{63/64"} Naturale R9

GRIGIO DI GRE'

 **6,5MM Rettificato**

EJ1J 160x320 - 62^{63/64"}x125^{63/64"} Naturale R9

GRIS DU GENT

 **6,5MM Rettificato**

EJ06 160x320 - 62^{63/64"}x125^{63/64"} Naturale R9

SOLID COLORS

WHITE

 **6,5MM Rettificato**

EJ14 160x320 - 62^{63/64"}x125^{63/64"} Naturale R9

EJ16 160x320 - 62^{63/64"}x125^{63/64"} Full Lappato

DELIVERY:



8 weeks lead time for fabrication based on slab availability + shipping time

PRICE:




On request









TECHNICAL SHEET

	162x324 - 63 ^{25/32"} x127 ^{9/16"} - 12 mm				
	Naturale R9	Naturale R9 Rett.	Full Lappato	Full Lappato Rett.	BookMatch Full Lappato
BIANCO ARNI Marble	 A B ELCC ELCD				 A B ELCJ ELCK
GRAPHITE Marble	 EHY3				 A B EHY8 EJ2J
LASA Marble	 ELKT		 ELKV		
NERO MARQUINIA Marble	 EHY5				 A B EHYA EHYC
QUARZO BLUEGREY Marble	 ELCG		 ELCN		
SAHARA NOIR Marble	 ELAA		 ELAG		
STATUARIETTO Marble	 EHY4		 EHY9		
STATUARIO SELECT Marble	 EHY2		 EHY7		
VERDE AVER Marble	 ELAC				




	162x324 - 63 ^{25/32"} x127 ^{9/16"} - 12 mm				
	Naturale R9	Naturale R9 Rett.	Full Lappato	Full Lappato Rett.	BookMatch Full Lappato
VERDE BORGOGNA Marble	 ELCF		 ELCM		
BIANCO Concrete	 EHZJ				
GRIGIO CHIARO Concrete	 EHZK				
GRIGIO SCURO Concrete	 EHZL				
CEPPO DI GRE' Stone	 EJ1C				
GRANITO BLACK Stone	 EJ1F				
GRIS DU GENT Stone	 EJ1E				
MOONSTONE Stone	 EJ1D				
WHITE Solid Colors			 EJ12		

	160x320 - 62 ^{53/64"} x125 ^{63/64"} - 6,5 mm				
	Naturale R9	Naturale R9 Rett.	Full Lappato	Full Lappato Rett.	BookMatch Full Lappato Rett.
BIANCO ARNI Marble					 A B ELCU ELCV
QUARZO BLUEGREY Marble					
		ELCS		ELCY	
SAHARA NOIR Marble					
				EHYJ	
VERDE AVER Marble					
		ELAJ		EHYK	
VERDE BORGOGNA Marble					
		ELCR		ELCX	
CEPPO DI GRE' Stone					
		EJ1J			
GRANITO BLACK Stone					
		EJ07			
GRIS DU GENT Stone					
		EJ06			
WHITE Solid					
		EJ14		EJ16	

	120x278 - 47 ^{1/4"} x109 ^{7/16"} - 6,5 mm				
	Naturale R9	Naturale R9 Rett.	Full Lappato	Full Lappato Rett.	BookMatch Full Lappato Rett.
BROWN EMPERADOR Marble					
				EHZ8	
CALACATTA GOLD Marble					
		EHYR		EHZA	
FRAPPUCCINO Marble					
		EHYS		EHZC	
GRAPHITE Marble					
		EHYQ		EHZ9	
LASA Marble					
		EHYT		EHZD	
NERO MARQUINIA Marble					
		EHYV		EHZF	
ONICE BIANCO Marble					
				EKJX	
QUARZO BLUEGREY Marble					
		ELD6		ELD2	
SAINT LAURENT Marble					
		EHYW		EHZG	
STATUARIETTO Marble					
		EHYU		EHZE	
STATUARIO SELECT Marble					
		EHYP		EHZ6	
VERDE AVER Marble					
		ELAL		EKJZ	
VERDE BORGOGNA Marble					
		ELD5		ELD1	

	120x278 - 47 ¹ / ₄ "x109 ⁷ / ₁₆ " - 6,5 mm				
	Naturale R9	Naturale R9 Rett.	Full Lappato	Full Lappato Rett.	BookMatch Full Lappato Rett.
BIANCO Concrete		 EHZN			
BOTANIC DECOR Concrete		 EHZR EHZS EHZT			
GRIGIO CHIARO Concrete		 EHZN			
GRIGIO SCURO Concrete		 EHZQ			
CEPPO DI GRE' Stone		 EKK1			
SLATE BLACK Stone		 EJ22			
SLATE GREY Stone		 EJ21			
SLATE WHITE Stone		 EJ20			

* Also available in 9,5 mm standard porcelain tile version. - Call or email for details.
 Δ Also available in a coordinating 9,5 mm standard porcelain tile version. - Call or email for details.

	120x278 - 47 ¹ / ₄ "x109 ⁷ / ₁₆ " - 6,5 mm				
	Naturale R9	Naturale R9 Rett.	Full Lappato	Full Lappato Rett.	BookMatch Full Lappato Rett.
BEIGE Resine		 EJ0P			
BIANCO Resine		 EJ0M			
GRIGIO Resine		 EJ0N			
GRISAILLE DECOR Resine		 EJ0V EJ0W EJ0X			
VERDE CHIARO Resine		 EJ0Q			
WHITE Solid Colors		 ELAU		 ELAS	

	120x120 - 47 ¹ / ₄ "x47 ¹ / ₄ " - 6,5 mm				
	Naturale R9	Naturale R9 Rett.	Full Lappato	Full Lappato Rett.	BookMatch Full Lappato Rett.
VERDE AVER Marble		 ELAN			
WHITE Solid Colors		 ELAY		 ELAW	

ERGON SLABS USA

ANSI A.137.3 Gauged Porcelain Tile and Gauged Porcelain Tile Panels/Slabs ISO 13006 EN 14411



TECHNICAL FEATURES

CARATTERISTICHE TECNICHE / CARACTERISTIQUES TECHNIQUES
TECHNISCHE EIGENSCHAFTEN / CARACTERISTICAS TECNICAS

TECHNICAL FEATURES Caratteristiche Tecniche Caracteristiques Techniques Technische Eigenschaften Características Técnicas	TESTING METHOD Metodo di prova Méthode d'essai Prüfmethode Método de prueba	VALUES - Valori - Valeurs - Werte - Valores			
		6,5 mm		12 mm	
		Naturale	Full Lappato	Naturale	Full Lappato
LENGTH AND WIDTH (A) Lunghezza e Larghezza - Longueur et largeur - Länge und Breite - Longitud y anchura	UNI EN ISO 10545/2	± 2% (Max 5mm)	± 2% (Max 5mm)	-	-
LENGTH AND WIDTH (B) Lunghezza e Larghezza - Longueur et largeur - Länge und Breite - Longitud y anchura	UNI EN ISO 10545/2	± 0,6% / ± 2,0 mm	± 0,6% / ± 2,0 mm	-	-
THICKNESS Spessore - Epaisseur - Stärke - Espesor	UNI EN ISO 10545/2	± 0,5% / ± 0,5 mm	± 0,5% / ± 0,5 mm	± 0,5% / ± 0,5 mm	± 0,5% / ± 0,5 mm
EDGE STRAIGHTNESS Rettilineità degli spigoli - Rectitude des arêtes Geradlinigkeit der Kanten - Rectitud de los cantos	UNI EN ISO 10545/2	± 0,5% / ± 1,5 mm	± 0,5% / ± 1,5 mm	-	-
ORTHOGONALITY - Ortogonalità Orthogonalité - Rechtwinkligkeit - Ortogonalidad	UNI EN ISO 10545/2	± 0,5% / ± 2,0 mm	± 0,5% / ± 2,0 mm	-	-
FLATNESS Planarità - Planéité - Ebenflächigkeit - Planaridad	UNI EN ISO 10545/2	± 0,5% / ± 2,0 mm	± 0,5% / ± 2,0 mm	± 0,5% / ± 2,0 mm	± 0,5% / ± 2,0 mm
APPEARANCE Aspetto - Aspekt - Aspect - Aspecto	UNI EN ISO 10545/2	> 95%	> 95%	> 95%	> 95%
WATER ABSORPTION Assorbimento d'acqua - Absorption d'eau Wasseraufnahme - Absorción de agua	UNI EN ISO 10545/3	Conforme	Conforme	Conforme	Conforme
	ASTM C373	Compliant	Compliant	Compliant	Compliant
MODULUS OF RUPTURE Modulo di rottura - Resistance a la flexion Biegefestigkeit - Resistencia a la flexion	UNI EN ISO 10545/4	≥ 35 N/mm²	≥ 35 N/mm²	≥ 35 N/mm²	≥ 35 N/mm²
BREAKING STRENGTH Forza di rottura - Résistance à la rupture Bruchlast - Resistencia a la rotura	UNI EN ISO 10545/4	≥ 700 N	≥ 700 N	≥ 1300 N	≥ 1300 N
	ASTM C648	≥ 250 lbf	≥ 250 lbf	≥ 250 lbf	≥ 250 lbf
IMPACT RESISTANCE Resistenza all'urto - Résistance aux chocs Schlagfestigkeit - Resistencia al impacto	UNI EN ISO 10545/5	-	-	0,85	0,85
RESISTANCE TO SURFACE ABRASION Resistenza all'abrasione superficiale Résistance à l'abrasion superficielle Abriebfestigkeit Resistencia a la abrasión superficial	UNI EN ISO 10545/7	Dark colors: 2-3 Medium colors: 4 Light colors: 5	Dark colors: 2-3 Medium colors: 4 Light colors: 5	Dark colors: 2-3 Medium colors: 4 Light colors: 5	Dark colors: 2-3 Medium colors: 4 Light colors: 5
LINEAR THERMAL EXPANSION Coefficiente di dilatazione termica lineare Linear thermal expansion coefficient Coefficient linéaire de dilatation thermique Linearer Wärmeausdehnungskoeffizient Coeficiente de dilatación térmica lineal	UNI EN ISO 10545/8	≤ 9 x10 ⁻⁶ °C ⁻¹	≤ 9 x10 ⁻⁶ °C ⁻¹	≤ 9 x10 ⁻⁶ °C ⁻¹	≤ 9 x10 ⁻⁶ °C ⁻¹
THERMAL SHOCK RESISTANCE Resistenza agli sbalzi termici - Résistance aux écarts de température - Temperaturwechselbeständigkeit Resistencia al choque térmico	UNI EN ISO 10545/9	Conforme	Conforme	Conforme	Conforme
HAIR-CRACKING RESISTANCE Resistenza al cavillo - Résistance aux craquelures Haarissbeständigkeit - Resistencia al cuarteo	UNI EN ISO 10545/11	Conforme	Conforme	Conforme	Conforme
FROST RESISTANCE Resistenza al gelo - Résistance au gel Frostbeständigkeit - Resistencia a las heladas	UNI EN ISO 10545/12	Conforme	Conforme	Conforme	Conforme
	ASTM C1026	Unaffected	Unaffected	Unaffected	Unaffected
CHEMICAL RESISTANCE to high and low acid and basic concentrations Resistenza Chimica ad alte e basse concentrazioni di acidi e basi Résistance chimique aux hautes et basses concentrations d'acides et de bases Chemikalienfestigkeit bei hohen und niedrigen Konzentrationen von Säuren und Basen Resistencia química con concentraciones altas y bajas de ácidos y bases	UNI EN ISO 10545/13	A - LA - LB HA - HB	A - LA - LB HA - HB	A - LA - LB - HA - HB	A - LA - LB - HA - HB
	ASTM C-650	Unaffected	Unaffected	Unaffected	Unaffected
STAIN RESISTANCE Resistenza alle macchie - Résistance aux taches Fleckenbeständigkeit - Resistencia a las manchas	UNI EN ISO 10545/14	5	5	5	5
	ASTM C1378	Class A	Class A	Class A	Class A
COLOUR RESISTANCE TO LIGHT EXPOSURE Resistenza dei colori alla luce - Résistance des couleurs à la lumière - Lichtechtheit der Farben - Resistencia de los colores a la exposición de la luz	DIN 51094	Conforme	Conforme	Conforme	Conforme
RELEASE OF DANGEROUS SUBSTANCES (PIOMBO - CADMIO) Rilascio di sostanze pericolose (Piombo/Cadmio) Dégagement de substances dangereuses (Piombo/ Cadmio) Freisetzung gefährlicher Stoffe (Piombo/Cadmio) Emisión de substancias peligrosas (Piombo/Cadmio)	UNI EN ISO 10545/15 (mg/l)	-	-	0	0
CALCULATION OF APPARENT DENSITY Determinazione della massa volumetrica apparente Détermination de la masse volumique apparente - Bestimmung der Rohdichte - Determinación de la masa volumétrica aparente	UNI EN ISO 14617/1 (Kg/m3)	-	-	2500	2500



TECHNICAL FEATURES Caratteristiche Tecniche Caracteristiques Techniques Technische Eigenschaften Características Técnicas	TESTING METHOD Metodo di prova Méthode d'essai Prüfmethode Método de prueba	VALUES - Valori - Valeurs - Werte - Valores			
		6,5 mm		12 mm	
		Naturale	Full Lappato	Naturale	Full Lappato
SLIP RESISTANCE Coefficiente di attrito Coefficient de glissement Rutschfestigkeit Barfußbereich Coeficiente de atrito medio	DIN EN 16165 Annex B	R9 (except Botanic Decor Grisaille Decor)	-	R9	-
	DIN EN 16165 Annex A	Na	-	Na	-
	ANSI A326.3:2017 DCOF	≥ 0,42	-	≥ 0,42	-
	B.C.R.A. D.M. N. 236 14/6/89	≥ 0,40	-	≥ 0,40	-
	AS 4586-2013 Anexo A	Na	-	Na	-
	BS 7976-2: 2002 BSEN13036-4:2011 Pendulum testers	Na	-	Na	-
	UNE 41901:2017 EX DB SUA (actual)	Na	-	Na	-
CALCULATION OF WATER ABSORPTION Determinazione dell'assorbimento d'acqua Détermination de l'absorption d'eau - Bestimmung der Wasseraufnahme - Determinación de la absorción de agua	UNI EN ISO 14617/1 (%)	-	-	< 01	< 01
BENDING STRENGTH Resistenza alla flessione - Résistance à la flexion Biegefestigkeit - Resistencia a la flexión	UNI EN ISO 14617/2 (MPa)	-	-	> 35	> 35
DEEP ABRASION Abrasion profonda - Abrasion profonde Tiefenverschleiß - Abrasión profunda	UNI EN ISO 14617/4 (mm)	-	-	24-27	24-27
CALCULATION OF FREEZE Determinazione della resistenza a gelo-disgelo Détermination de la résistance au gel/dégel Bestimmung der Frost-Tauwechsel-Beständigkeit Determinación de la resistencia a las heladas	UNI EN ISO 14617/5	-	-	No change in bending strength after thermal cycle - Nessuna variazione di carico di rottura dopo ciclo termico - Aucune variation de la charge de rupture après le cycle thermique - Keine Bruchlastveränderung nach Temperaturzyklus - Ninguna variación de carga de rotura tras ciclo térmico	No change in bending strength after thermal cycle - Nessuna variazione di carico di rottura dopo ciclo termico - Aucune variation de la charge de rupture après le cycle thermique - Keine Bruchlastveränderung nach Temperaturzyklus - Ninguna variación de carga de rotura tras ciclo térmico
CALCULATION OF THERMAL SHOCK RESISTANCE Determinazione della resistenza allo shock termico Détermination de la résistance aux chocs thermiques Bestimmung der Temperaturwechselbeständigkeit Determinación de la resistencia a los cambios bruscos de temperatura	UNI EN ISO 14617/6	-	-	No change in bending strength after thermal cycle - Nessuna variazione di carico di rottura dopo ciclo termico - Aucune variation de la charge de rupture après le cycle thermique - Keine Bruchlastveränderung nach Temperaturzyklus - Ninguna variación de carga de rotura tras ciclo térmico	No change in bending strength after thermal cycle - Nessuna variazione di carico di rottura dopo ciclo termico - Aucune variation de la charge de rupture après le cycle thermique - Keine Bruchlastveränderung nach Temperaturzyklus - Ninguna variación de carga de rotura tras ciclo térmico
IMPACT RESISTANCE Resistenza all'urto - Résistance aux chocs Schlagfestigkeit - Resistencia al impacto	UNI EN ISO 14617/9	-	-	3J	3J
VOLATILE ORGANIC COMPOUND EMISSION TEST Prova di emissioni di composti organici volatili Essai d'émissions de composés organiques volatils Messung der Emission von flüchtigen organischen Verbindungen - Prueba de emisiones de compuestos orgánicos volátiles	ISO 16000/9	-	-	Class A+ / Classe A+ / Classe A+ Klasse A+ / Categoría A+	Class A+ / Classe A+ / Classe A+ Klasse A+ / Categoría A+
RESISTANCE TO COLD LIQUIDS Resistenza ai liquidi freddi - Résistance aux liquides froids - Beständigkeit gegen kalte Flüssigkeiten Resistencia a los líquidos fríos	EN 12720:2013	-	-	Class 5 to Class 3 - da Classe 5 a Classe 3 - de Classe 5 à Classe 3 - von Klasse 5 bis Klasse 3 - de Categoría 5 a Categoría 3	Class 5 to Class 3 - da Classe 5 a Classe 3 - de Classe 5 à Classe 3 - von Klasse 5 bis Klasse 3 - de Categoría 5 a Categoría 3
RESISTANCE TO DAMP HEAT Resistenza al calore umido - Résistance à la chaleur humide - Beständigkeit gegen feuchte Hitze Resistencia al calor húmedo	EN 12721:2013	-	-	CEN/TS 16209 Class A / Classe A / Classe A Klasse A / Categoría A	CEN/TS 16209 Class A / Classe A / Classe A Klasse A / Categoría A
RESISTANCE TO DRY HEAT Resistenza al calore secco - Résistance à la chaleur sèche - Beständigkeit gegen trockene Hitze Resistencia al calor seco	EN 12722:2013	-	-	CEN/TS 16209 Class A / Classe A / Classe A Klasse A / Categoría A	CEN/TS 16209 Class A / Classe A / Classe A Klasse A / Categoría A
DIRT RETENTION Tendenza a ritenere lo sporco Tendance à retenir la saleté Neigung zur Schmutzbindung Tendencia a retener la suciedad	EN 9300:2015	-	-	No visible change - Nessun cambiamento visibile - Pas d'altération visible - Keine sichtbare Veränderung - Ningún cambio visible	No visible change - Nessun cambiamento visibile - Pas d'altération visible - Keine sichtbare Veränderung - Ningún cambio visible
SCRATCH RESISTANCE Resistenza alla graffiatura - Résistance aux rayures Kratzfestigkeit - Resistencia a los arañazos	EN 15186:2012 met. B	-	-	CEN/TS 16209 Class A / Classe A / Classe A Klasse A / Categoría A	CEN/TS 16209 Class A / Classe A / Classe A Klasse A / Categoría A
RESISTANCE TO FUNGI Resistenza ai funghi - Résistance aux champignons Beständigkeit gegen Schimmel - Resistencia a los hongos	ASTM G 21	-	-	No fungi - Nessuna crescita fungina - Aucune croissance fongique - Kein Schimmelwachstum - Ningún crecimiento de hongos	No fungi - Nessuna crescita fungina - Aucune croissance fongique - Kein Schimmelwachstum - Ningún crecimiento de hongos



PACKING

IMBALLI / EMBALLAGE / VERPACKUNG / EMBALAJE

Formato Size Format Format Tamaño cm	Spessore Thickness Épaisseur Stärke Espesor mm	Pieces x Sqm Pz. x Mq. Pcs / M² Stk. x Qm Pzs x Mc.	Pieces x Box Pz. x Scat. Pcs / Bte Stk. x Krt. Pzs x Caja	Sqm x Box Mq. x Scat. M² / Bte Qm x Krt. Mc. x Caja	Weight x Box Peso x Scat. Poids / Bte Gewicht x Krt. Peso x Caja Kg	Boxes x Pal. Scat. x Pal. Bte / Pal. Krt. x Pal. Cajas x Pal.	Sqm x Pal. Mq. x Pal. M² / Pal. Qm x Pal. Mc. x Pal.	Weight x Pal. Peso x Pal. Poids / Pal. Gewicht x Pal. Peso x Pal. Kg
162x324 Naturale R9/Full Lapp.	12	0,19	1	5,249	152,22		see below	
160x320 Naturale R9/Full Lapp.	6,5	0,20	1	5,120	76,80		vedi sotto	
120x278 Naturale R9/Full Lapp.	6,5	0,30	1	3,336	50,04		voir ci-dessous	
120x120 Naturale R9/Full Lapp.	6,5	0,69	2	2,880	43,20	20	siehe unten	vea abajo

Item Articolo Reference Artikel Articulo	Thickness (mm) Spessore (mm) Épaisseur (mm) Stärke (mm) Espesor (mm)	Size (cm) Dimensione (cm) Format (cm) Format (cm) Tamaño (cm)	No. of Slabs Nr. Lastre Nbre Dalles Anz. Platten Nº de Placas	Sqm per Pack Mq. x Imballo m2 / Emballage qm pro Verpackung m2 por embalaje	Weight of Packaging (kg) Peso Imballo (Kg) Poids Emballage (kg) Gewicht Verpackung (kg) Peso embalaje (kg)	Weight of Packaging + Slabs (kg) Peso Imballo+Lastre (Kg) Poids Emballage+Dalles (kg) Gewicht Verpackung+Platten (kg) Peso embalaje + placas (kg)
 160x320/162x324 Crate Cassa Caisse Kiste Caja	6,5	175x345x41	14	71,68	172	1247
	12	175x345x41	9	47,24	172	1542
 120x278 Crate Cassa Caisse Kiste Caja		140x291x29h	5	16,68	107	357,20
	6,5	140x291x41h	18	60,05	147	1047,72
 160x320/162x324 A-Frame Cavalletto Chevalet de transport Transportgestell Caballlete	6,5	75x330x200	40	204,80	220	3292
	12	75x330x200	20	104,98	220	3264
 120x278 A-Frame Cavalletto Chevalet de transport Transportgestell Caballlete	6,5	75x290x160h	40	133,44	180	2181,60
 160x320/162x324 Metal A-Frame Cavalletto in metallo Chevalet de transport en métal Metall Transportgestell Caballlete de metal	6,5	75x339x186	40	204,80	124	3196
	12	75x339x186	20	104,98	124	3168

NSF

The NSF Food Equipment certification program has 22 different standards that set minimum food hygiene and protection requirements for the materials, design, manufacturing, construction and performance of equipment for handling and processing food. The materials for solid surfaces are examined based on the “NSF / ANSI 51: Food Equipment Materials” standard, which specifies the public health requirements for materials used in the construction of commercial food equipment.

More information is available on the website:
info.nsf.org/Certified/Food

The full, up-to-date list of certified products can be viewed at www.nsf.org.
Please contact the Emileramica Group for any further information.



Il programma di certificazione NSF Food Equipment ha 22 diversi standard che stabiliscono i requisiti minimi di protezione e igiene alimentare riguardo ai materiali, la progettazione, la fabbricazione, la costruzione e le prestazioni delle attrezzature per la manipolazione e il trattamento degli alimenti. I materiali per superfici solide vengono esaminati in base alla “NSF / ANSI 51: Materiali per attrezzature alimentari”, che specifica i requisiti relativi alla salute pubblica per i materiali utilizzati nella costruzione di attrezzature alimentari commerciali.

Maggiori informazioni sono disponibili sul sito:
info.nsf.org/Certified/Food

La lista completa e aggiornata dei prodotti certificati è visionabile sul sito www.nsf.org.
Per qualsiasi ulteriore informazione contattare Emileramica Group.



The GREENGUARD Certification process provides an in-depth review and analysis of chemical emissions from manufacturers’ products. Using dynamic environmental chamber testing, products are tested for volatile organic compounds (VOCs), including formaldehyde, and over 300 other VOCs with health-based limits.

GREENGUARD Certified products aid in the creation of healthier indoor environments, and release fewer pollutants that can contribute to health issues including asthma and other respiratory issues.

To remain certified, products undergo comprehensive certification testing on an annual basis, giving consumers peace of mind that they are selecting products that support better human health.

Recognized and referenced by over 400 codes, rating systems, and procurement policies worldwide, the GREENGUARD Certification requires that products meet some of the world’s most rigorous and comprehensive limits for low emissions of volatile organic compounds into indoor environments.

The GREENGUARD Gold standard includes health-based criteria for additional chemicals and requires lower total VOC emissions levels to ensure that products are acceptable for use in environments such as schools and healthcare facilities. In addition to limiting emissions of more than 360 VOCs and total chemical emissions, GREENGUARD Gold Certified products must also comply with requirements of the State of California’s Department of Public Health “Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from known as California Section 01350.



CONSIGLI DI POSA E MANUTENZIONE
(RESINE / GRISAILLE / BOTANIC)

Le lastre del decoro Grisaille e del decoro Botanic sono prodotte con una nuova tecnologia che permette di realizzare lastre estremamente curate dal punto di vista grafico e decorativo, caratterizzando ogni singolo esemplare con piccoli dettagli estetici e cromatici assolutamente unici, tra cui anche eventuali piccole imperfezioni, replicando di fatto i risultati normalmente raggiunti con le tradizionali metodologie artigianali. A differenza di quanto avviene per la gran parte degli altri prodotti in gres porcellanato, la cottura dei materiali non avviene ad elevate temperature.

Per le qualità tecniche del tutto particolari, le lastre necessitano dei seguenti fondamentali accorgimenti.

Destinazione

Le lastre possono essere usate solo ed esclusivamente per rivestire le pareti negli ambienti indoor.

Posa in opera

Durante lo spostamento, occorre prestare la massima attenzione affinché le lastre non entrino in contatto con materiali abrasivi, altre lastre, piani di lavoro o altri strumenti che potrebbero danneggiarle.

Taglio delle lastre

Le lastre devono essere tagliate sul retro, utilizzando una taglierina in gres per l'incisione. Durante l'intero taglio, la lama deve sempre aderire alle lastre.

Stuccatura della superficie posata

Prima della stuccatura si consiglia di usare scotch di carta per proteggere la superficie delle lastre. Per la stuccatura si raccomanda di usare sempre e solo sigillanti cementizi e spatole in materiale plastico. Al termine dell'operazione occorre pulire subito i residui, prima dell'indurimento dello stucco, utilizzando acqua calda e una spugna non abrasiva, in modo da non danneggiare la superficie delle lastre.

Pulizia e manutenzione dopo la posa

Per la prima pulizia delle lastre si raccomanda di impiegare acqua o detergenti neutri, usando una spugna morbida o un panno in microfibra. L'eventuale uso di prodotti anticalcare a base acida è consentito, purchè si abbia l'accortezza di risciacquare subito la superficie delle lastre con acqua dopo la loro applicazione. Si raccomanda infine di non utilizzare mai solventi a base alcolica, o di altro genere, n. spugne abrasive, in modo da non danneggiare la superficie delle lastre.

Pulizia ordinaria

Per la pulizia ordinaria si raccomanda di impiegare acqua o detergenti neutri, usando una spugna morbida o un panno in microfibra. L'eventuale uso di prodotti anticalcare a base acida è consentito, purchè si abbia l'accortezza di risciacquare subito la superficie delle lastre con acqua dopo la loro applicazione. Si raccomanda infine di non utilizzare mai solventi a base alcolica, o di altro genere, n. spugne abrasive, in modo da non danneggiare la superficie delle lastre.



INSTALLATION AND CARE ADVICE
(RESINE / GRISAILLE / BOTANIC)

Grisaille and Concrete Botanic decor are produced via a new technology enabling the manufacture of slabs with extremely fine decoration and patterning, in which every single piece has absolutely unique small graphic and colour details, also including minor flaws which replicate the outcomes usually produced by traditional hand-crafting methods. Unlike most other porcelain stoneware products, these materials are not fired at high temperatures.

Due to their very distinctive technical characteristics, the following recommendations must always be complied with when using these slabs.

Intended uses

Slabs may only be used for covering indoor walls.

Installation

When handling, take great care to ensure that the slabs do not come into contact with abrasive materials, other slabs, worktops or tools which could damage them.

Cutting slabs

Slabs must be cut from the back, scoring them with a cutter for stoneware. The blade must adhere to the slab throughout the cut.

Grouting the installed surface

Before grouting, the surfaces of slabs should be protected with masking tape. When grouting, only use cement-based sealants and plastic trowels. When done, clean residues away before the grout sets, using hot water and a nonabrasive sponge to avoid damaging the surfaces of the slabs.

Post-installation cleaning and care

The slabs should be cleaned the first time using water or neutral cleaners, with a soft sponge or microfibre cloth. Never use solvents or abrasive sponges, which might damage the surfaces of the slabs.

Routine cleaning

For routine cleaning, use water or neutral cleaners with a soft sponge or microfibre cloth. Acid anti-limescale products may be used provided the surfaces of the slabs are rinsed with water immediately after their application. Finally, never use alcohol-based or other solvents, or abrasive sponges, as they may damage the surfaces of the slabs.

[illegible][illegible]

Slabs USA



I colori e le caratteristiche estetiche dei materiali illustrati nel presente catalogo sono da ritenersi puramente indicativi.

Le misure dei prodotti qui indicate si intendono nominali e come i pesi ed i colori subiscono le variazioni tipiche del processo ceramico.

Ergon Slabs USA si riserva la facoltà di modificare in qualunque momento senza preavviso le caratteristiche tecniche, estetiche e i materiali presentati.

Tali caratteristiche non sono comunque vincolanti nei termini legali.

Colours and optical features of the materials illustrated in this catalogue are to be regarded as mere indications.

Product sizes indicated are nominal and like weights and colours undergo the typical variations of the ceramic process.

Ergon Slabs USA reserves the right to change the technical and optical features of the materials illustrated at any time and without notice.

These features are not legally binding.



EMIL
AMERICA

EmilAmerica Inc.	Headquarter Emilceramica srl
22701 Dulles Summit Court Dulles, VA 20166 - USA T: 703-481-1150 ext 201 emilamerica.com	Via Ghiarola Nuova, 29 - 41042 Fiorano Modenese (Mo) Italy T +39 0536 835111 - info@emilceramicagroup.it emilgroup.it