



MATERASTONE



EMIL
AMERICA

 STOCKED IN THE US



MATERASTONE




Porcelain Tiles

ISO 13006 Annex G - UNI EN 14411 Annex G - Bla UGL


ANSI A137.1 - CLASS P1

Design and innovation meet in Matera Stone, offering surfaces with high-performing technical characteristics combined with an exquisite aesthetic, created in two finishes. In the Naturale finish the material is rich in details, enhanced by use of the exclusive Digitouch technology combined with a fine, delicate texture synchronised with the underlying patterning. In the Silktech finish, the characteristics of the Naturale version are provided together with the soft, silky 'feel' typical of this surface. The Ritmo decor adds three-dimensionality and variety to design schemes with a dynamic texture constructed using the various stone-look shades.


White Neutra

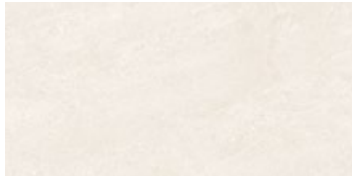

Beige Neutra

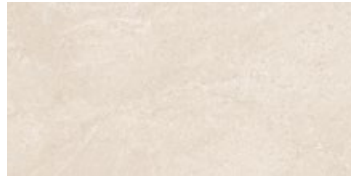

Greige Neutra

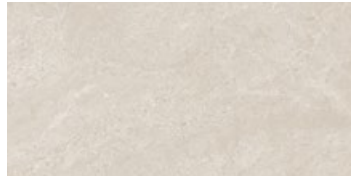

Dark Grey Neutra



White Sassi



Beige Sassi



Greige Sassi



Dark Grey Sassi



White Ritmo




Beige Ritmo



Greige Ritmo



Dark Grey Ritmo



NEUTRA

Silktech R10 Rett.

60x120 - 23^{5/8}"x47^{1/4}"

EN52 White

EN53 Beige

EN54 Greige

ENGX Dark Grey

up to 19 patterns

SASSI

Silktech R10 Rett.

60x120 - 23^{5/8}"x47^{1/4}"

EN4Y White

EN4Z Beige

EN4X Greige

EN50 Dark Grey

up to 17 patterns

RITMO

Silktech R10 Rett.

60x120 - 23^{5/8}"x47^{1/4}"

EN6S Ritmo White

EN6R Ritmo Beige


EN6T Ritmo Greige

EN6Q Ritmo Dark Grey

4 patterns

MOSAIC*

Chip 1^{1/8}"x1^{1/8}"



NEUTRA

Silktech R10

30x30 - 11^{13/16}"x11^{13/16}"


ENHD White

ENHA Beige

ENHE Greige

ENHC Dark Grey

* On fibre mesh backing



NEUTRA

Silktech R10 Rett.

30x60 - 11^{13/16}"x23^{5/8}"

EN6N White

EN6M Beige

EN6L Greige

ENJ1 Dark Grey

up to 76 patterns



Bullnose NEUTRA

Silktech R10 Rett.

7x60 - 2^{3/4}"x23^{5/8}"

Pcs. Box 16 - LM x Box 9,60

ENHJ White

ENHH Beige

ENHF Greige

ENHG Dark Grey

PERFORMANCE CHARACTERISTICS	STANDARD	TEST RESULT
Water Absorption	ASTM C373	Compliant
Breaking Strength	ASTM C648	≥ 400 lbf
Frost resistance	ASTM C1026	Unaffected
Chemical Resistance	ASTM C650	Unaffected
Stain resistance	ASTM C1378	Class A



Packing and Weight	Thickness mm	Pieces x Box	Sq. F. x Box	Weight x Box Lbs	Boxes x Pal.	Sq. F. x Pal.	Weight x Pal. Lbs
Size - Inches							
23 ^{5/8} "x47 ^{1/4} " Naturale R10	9,5	2	15.50	66.67	36	558.0	2400.8
11 ^{13/16} "x23 ^{5/8} " Naturale R10	9,5	6	11.63	52.38	48	558.0	2513.3
11 ^{13/16} "x11 ^{13/16} " Mosaic Naturale R10	9,5	5	4.84	19.25	60	290.6	1155.2